



FEATURES

- Mechanical, keyless, push button panic trim
- Takes the place of the keyed cylinder
- 1150 Lock Body
- One user code with thousands of possible combinations
- Heavy-duty lever handle
- Passage function
- Changeable handing
- Magnet-proof

COMPATIBLE WITH

LockeyUSA panic bars, DETEX panic bars, and any panic bars that accept a flat tailpiece and have a turn radius of 74 degrees or less

IDEAL FOR

Panic Exit Doors, Narrow Stile Doors, Commercial Doors, Churches, Hospitals, Schools

DIMENSIONS & SPECIFICATIONS

Dimensions:

- Length: 7 5/16"
- Width: 2 3/16"
- Depth: 2 3/8"

Lever Size:

- 5" W x 5/8" H

Material:

- Zinc-plated steel
- Teflon coated stainless steel interior


Door Thickness:

- 1 1/8" to 2"
- Up to 5" thick door with an Extension Kit (sold separately)

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

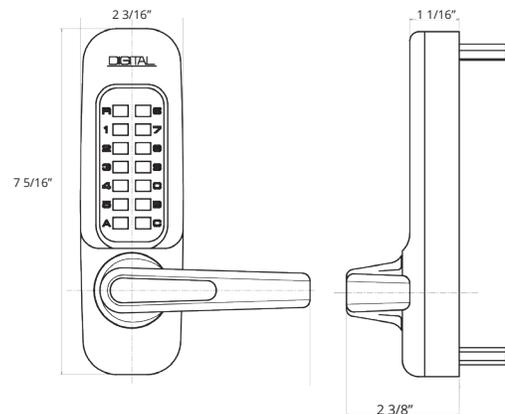

ORDERING INFORMATION

Finish

- Jet Black
- Marine Grade
- Oil Rubbed Bronze

Order

- 115P-JB
- 115P-MG
- 115P-OB





FEATURES

- Mechanical, keyless panic trim
- 2835 Lock Body
- One user code, thousands of possible combinations
- Takes the place of the keyed cylinder
- Changeable handing
- Lifetime Mechanical Warranty

COMPATIBLE WITH

- LockeyUSA panic bars, Detex panic bars, and any Panic bars that accept a flat tailpiece & have a turn radius of 74 degrees or less

IDEAL FOR

- Panic Exit Doors
- Narrow Stile Doors
- Commercial Doors
- Hospitals
- Schools

DIMENSIONS & SPECIFICATIONS

Dimensions:

Length: 5 5/8"

Width: 1 5/8"

Depth: 2 1/4"

Total Coverage with Trim Plates: 6" L x 2" W

ADA Lever Size: 4" W x 1" H

Door Thickness: 1 3/16" to 2"


Material: Zinc-plated steel

Teflon coated stainless steel interior components

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

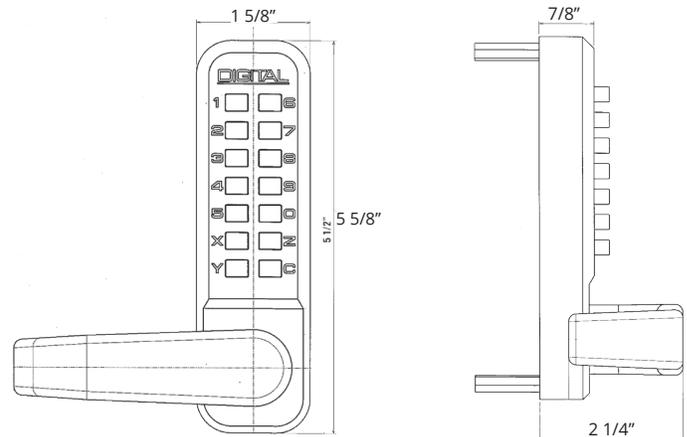

ORDERING INFORMATION

<u>Finish</u>	<u>Order Number</u>
Antique Brass	285P-AB
Bright Brass	285P-BB
Bright Chrome	285P-BC
Jet Black	285P-JB
Marine Grade	285P-MG
Oil Rubbed Bronze	285P-OB
Satin Chrome	285P-SC
Satin Nickel	285P-SN
White	285P-WH

FEATURES

- Mechanical, keyless, push button lock
- Option of lever handle or knob
- Heavy-duty handles
- Passage function
- Changeable handing
- Adjustable backset latch
- Magnet-proof

OPTIONS



DIMENSIONS & SPECIFICATIONS

Dimensions with lever:

- Length: 7 5/16"
- Width: 2 3/16"
- Depth: 2 3/8"

Lever Size: 5" W x 5/8" H

Dimensions with knob:

- Length: 7 5/16"
- Width: 2 3/16"
- Depth: 2 13/16"

Backset: Adjustable

Material: Zinc-plated steel

Teflon coated stainless steel interior components


Door Thickness: 1 1/8" to 2"

Up to 5" thick door with an Extension Kit (sold separately)

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

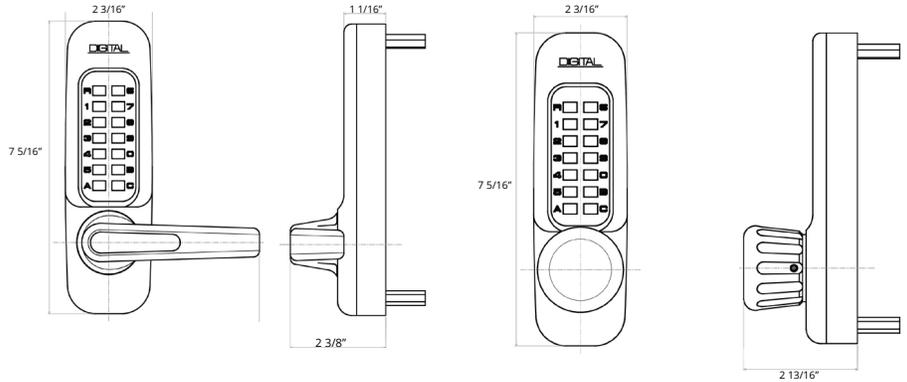

ORDERING INFORMATION

Finish	Lever	Knob	Lever Double Combination	Knob Double Combination
Jet Black	1150JB	1600JB	1150JBDC	1600JBDC
Marine Grade	1150MG	1600MG	1150MGDC	1600MGDC
Oil Rubbed Bronze	1150OB	1600OB	1150OBDC	1600OBDC





FEATURES

- Mechanical, keyless surface/rim mount deadbolt
- One user code
- Knob on exterior, thumb turn on interior
- Changeable handing
- Long and short bar included
- Ideal for narrow stile doors & cabinets
- Deadbolt throws 3/4"

OPTIONS

Key Override



Single Combination



Key Override

DIMENSIONS & SPECIFICATIONS

Dimensions:

- Length: 5 5/8"
- Width: 1 5/8"
- Depth: 1 5/8"

Total Coverage with Trim Plates: 6" L x 2 1/2" W

Door Thickness: 1 1/8" to 2"

Fits doors 1/8" thick and up with Thin Door Kit

Fits doors up to 5" thick with Extension Kit

Long Throw Bar: 2 1/4"

Short Throw Bar: 7/8"


Material: Zinc-plated steel

Teflon coated stainless steel interior components

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

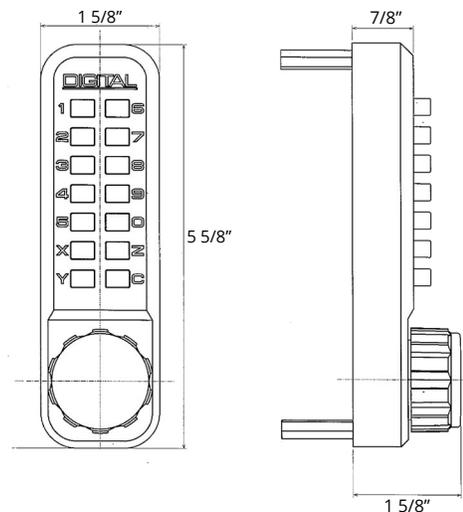

ORDERING INFORMATION

Finish	Single Combination	Key Override
Antique Brass	2200AB	2200ABKO
Bright Brass	2200BB	2200BBKO
Jet Black	2200JB	2200JBKO
Satin Chrome	2200SC	2200SCKO
Satin Nickel	2200SN	2200SNKO
White	2200WH	2200WHKO





FEATURES

- Mechanical, keyless deadbolt lock
- One user code
- Knob on exterior, thumb turn on interior
- Changeable handing
- Adjustable deadbolt backset
- Covers standard 2 1/8" hole

OPTIONS

- Single Combination, Double Combination (DC)
- Key Override



Single Combination



Double Combination



Key Override

DIMENSIONS & SPECIFICATIONS

Dimensions:

- Length: 5 5/8"
- Width: 1 5/8"
- Depth: 1 5/8"

Total Coverage with Trim Plates: 6 1/2" L x 2 1/2" W

Backset: Adjustable

Door Thickness: 1 3/16" to 2", up to 5" with Extension Kit


Material: Zinc-plated steel

Teflon coated stainless steel interior components

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

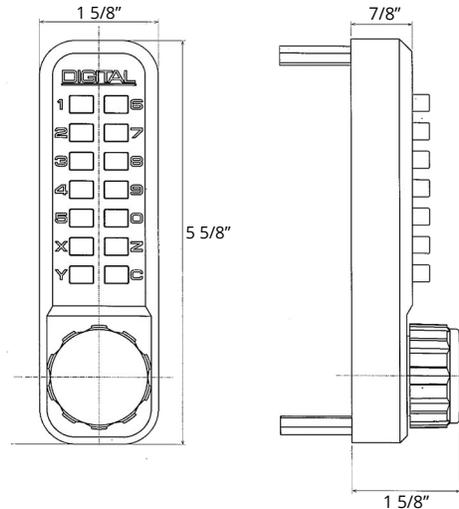

ORDERING INFORMATION

Finish	Single Combination	Double Combination	Key Override	Double Combination, Key Override
Antique Brass	2210AB	2210ABDC	2210ABKO	2210ABDCKO
Bright Brass	2210BB	2210BBDC	2210BBKO	2210BBDCKO
Bright Chrome	2210BC	2210BCDC	2210BCKO	2210BCDCKO
Jet Black	2210JB	2210JBDC	2210JBKO	2210JBDCKO
Marine Grade	2210MG	2210MGDC	2210MGKO	2210MGDCKO
Oil Rubbed Bronze	2210OB	2210OBDC	2210OBKO	2210OBDCKO
Satin Chrome	2210SC	2210SCDC	2210SCKO	2210SCDCKO
Satin Nickel	2210SN	2210SNDC	2210SNKO	2210SNDCKO
White	2210WH	2210WHDC	2210WHKO	2210WHDCKO



FEATURES

- Mechanical, keyless hook bolt lock
- One user code
- Knob on exterior, thumb turn on interior
- Changeable handing
- Ideal for sliding doors and gates
- 3/8" throw
- Oversized knob available

OPTIONS

Key Override



Single Combination



Key Override

DIMENSIONS & SPECIFICATIONS

Dimensions:

- Length: 5 5/8"
- Width: 1 5/8"
- Depth: 1 5/8"

Throw: 3/8"

Total Coverage with Trim Plates: 6 1/2" L x 2 1/2" W

Door Thickness: 1 1/8" to 2"

Fits doors 1/8" thick and up with Thin Door Kit

Fits doors up to 5" thick with Extension Kit


Material: Zinc-plated steel

Teflon coated stainless steel interior components

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

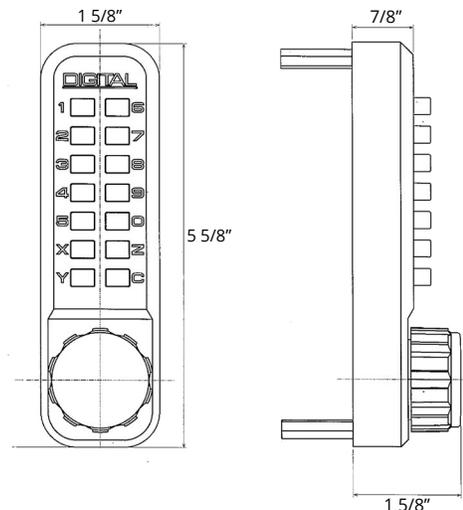

ORDERING INFORMATION

Finish	Single Combination	Key Override
Antique Brass	2500AB	2500ABKO
Bright Brass	2500BB	2500BBKO
Jet Black	2500JB	2500JBKO
Satin Chrome	2500SC	2500SCKO
Satin Nickel	2500SN	2500SNKO
White	2500WH	2500WHKO





FEATURES

- Mechanical, keyless lock with one user code
- Replaces 2230
- Knob on exterior and interior
- Auto-locking with passage function
- Reversible handing
- Adjustable latch
- Covers standard 2 1/8" hole

OPTIONS

Single Combination, Double Combination



Single Combination



Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:

- Length: 5 5/8"
- Width: 1 5/8"
- Depth: 2 1/4"

Total Coverage with Trim Plates: 6 1/2" L x 2 1/2" W

Backset: Adjustable

Door Thickness: 1 3/16" to 2", up to 5" with Extension Kit


Material: Zinc-plated steel

Teflon coated stainless steel interior components

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

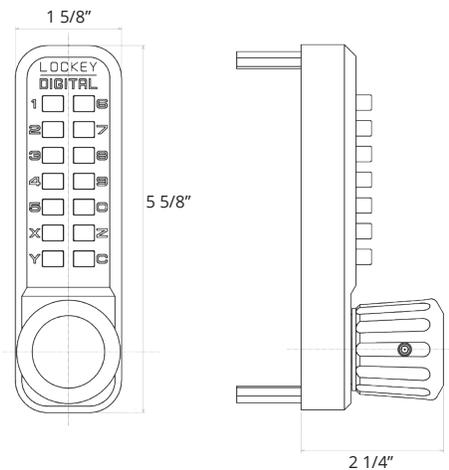

ORDERING INFORMATION

Finish	Single Combination	Double Combination
Antique Brass	2830AB	2830ABDC
Bright Brass	2830BB	2830BBDC
Bright Chrome	2830BC	2830BCDC
Jet Black	2830JB	2830JBDC
Marine Grade	2830MG	2830MGDC
Oil Rubbed Bronze	2830OB	2830OBDC
Satin Chrome	2830SC	2830SCDC
Satin Nickel	2830SN	2830SNDC
White	2830WH	2830WHDC





FEATURES

- Mechanical, keyless lever lock with one user code
- Lever handle on exterior and interior
- Auto-locking with passage function
- Reversible handing
- ADA Compliant
- Adjustable latch
- Covers standard 2 1/8" hole

OPTIONS

Single Combination, Double Combination



Single Combination



Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:

- Length: 5 5/8"
- Width: 1 5/8"
- Depth: 2 1/4"

Total Coverage with Trim Plates: 6 1/2" L x 2 1/2" W

ADA Lever Size: 4" W x 1" H

Backset: Adjustable

Door Thickness: 1 3/16" to 2", up to 5" with Extension Kit


Material: Zinc-plated steel

Teflon coated stainless steel interior components

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

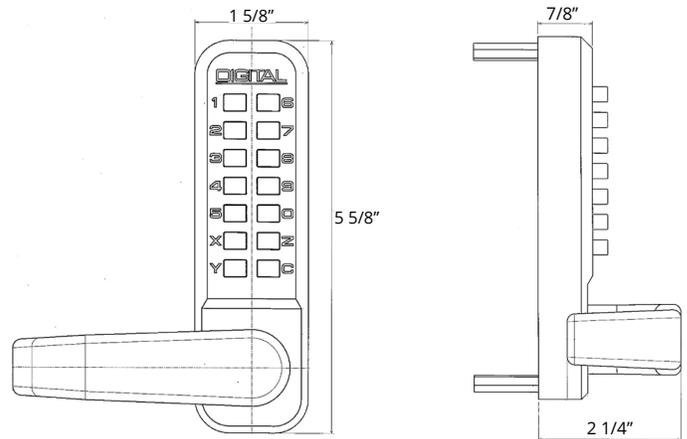

ORDERING INFORMATION

Finish

Single Combination Double Combination

Antique Brass	2835AB	2835ABDC
Bright Brass	2835BB	2835BBDC
Bright Chrome	2835BC	2835BCDC
Jet Black	2835JB	2835JBDC
Marine Grade	2835MG	2835MGDC
Oil Rubbed Bronze	2835OB	2835OBDC
Satin Chrome	2835SC	2835SCDC
Satin Nickel	2835SN	2835SNDC
White	2835WH	2835WHDC





FEATURES

- Mechanical, keyless, narrow stile deadbolt lock
- Replaces Adams-Rite style lock
- One user code
- Knob on exterior, thumb turn on interior
- Changeable handing
- 1 1/8" backset
- Ideal for gates and aluminum storefront doors

OPTIONS

Single Combination, Double Combination



Single Combination

Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:

- Length: 5 5/8"
- Width: 1 5/8"
- Depth: 1 5/8"

Total Coverage with Trim Plates: 6" L x 2" W

Door Thickness: 1 1/8" to 2", up to 5" with Extension Kit

Material: Zinc-plated steel

Teflon coated stainless steel interior components


Five-ply laminated steel bolt

Concealed hardened steel pin for maximum security

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

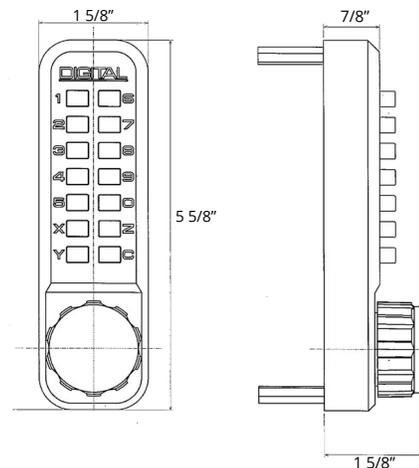

ORDERING INFORMATION

Finish	Single Combination	Double Combination
Antique Brass	2900AB	2900ABDC
Bright Brass	2900BB	2900BBDC
Bright Chrome	2900BC	2900BCDC
Jet Black	2900JB	2900JBDC
Marine Grade	2900MG	2900MGDC
Oil Rubbed Bronze	2900OIL	2900OILDC
Satin Chrome	2900SC	2900SCDC
Satin Nickel	2900SN	2900SNDC
White	2900WH	2900WHDC





FEATURES

- Mechanical, keyless, narrow stile lock
- Replaces Adams-Rite style lock
- Locks automatically, now with passage function
- One user code
- Knob on exterior, thumb turn on interior
- Changeable handing
- Ideal for aluminum storefront doors

OPTIONS

Single Combination, Double Combination



Single Combination

Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:

- Length: 5 5/8"
- Width: 1 5/8"
- Depth: 1 5/8"

Total Coverage with Trim Plates: 6" L x 2" W

Door Thickness: 1 1/8" to 2", up to 5" with Extension Kit

Backset: 1 1/8"


Material: Zinc-plated steel

Teflon coated stainless steel interior components

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

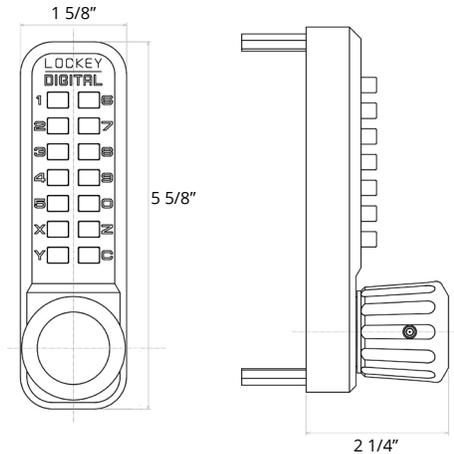

ORDERING INFORMATION

Finish	Single Combination	Double Combination
Antique Brass	2930AB	2930ABDC
Bright Brass	2930BB	2930BBDC
Bright Chrome	2930BC	2930BCDC
Jet Black	2930JB	2930JBDC
Marine Grade	2930MG	2930MGDC
Oil Rubbed Bronze	2930OIL	2930OBDC
Satin Chrome	2930SC	2930SCDC
Satin Nickel	2930SN	2930SNDC
White	2930WH	2930WHDC





FEATURES

- Mechanical, keyless, narrow stile hook bolt lock
- Replaces Adams-Rite style lock
- One user code
- Knob on exterior, thumb turn on interior
- Changeable handing
- 1 1/8" backset
- Ideal for sliding gates & aluminum storefront doors

OPTIONS

Single Combination, Double Combination



Single Combination

Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:

- Length: 5 5/8"
- Width: 1 5/8"
- Depth: 1 5/8"

Throw Size: 1 1/2"

Total Coverage with Trim Plates: 6" L x 2" W

Door Thickness: 1 1/8" to 2", up to 5" with Extension Kit


Five-ply laminated steel bolt

Concealed hardened steel pin for maximum security

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

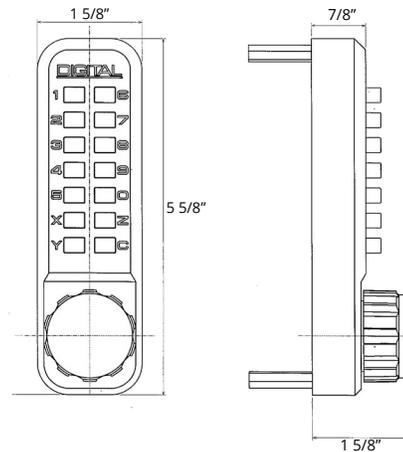

ORDERING INFORMATION

Finish	Single Combination	Double Combination
Antique Brass	2950AB	2950ABDC
Bright Brass	2950BB	2950BBDC
Bright Chrome	2950BC	2950BCDC
Jet Black	2950JB	2950JBDC
Marine Grade	2950MG	2950MGDC
Oil Rubbed Bronze	2950OIL	2950OILDC
Satin Chrome	2950SC	2950SCDC
Satin Nickel	2950SN	2950SNDC
White	2950WH	2950WHDC





FEATURES

- Mechanical, keyless, narrow stile lever handle lock
- Locks automatically (with passage function)
- Replaces Adams-Rite style lock
- One user code
- Lever on exterior and interior
- Changeable handing
- 1 1/8" backset
- Ideal for aluminum storefront doors

OPTIONS

Single Combination, Double Combination



Single Combination

Double Combination


DIMENSIONS & SPECIFICATIONS

Dimensions:

- Length: 5 5/8"
- Width: 1 5/8"
- Depth: 2 1/4"

Total Coverage with Trim Plates: 6 1/2" L x 2 1/2" W
Door Thickness: 1 1/8" to 2", up to 5" with Extension Kit
Backset: 1 1/8"

Material: Zinc-plated steel
 Teflon coated stainless steel interior components
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty

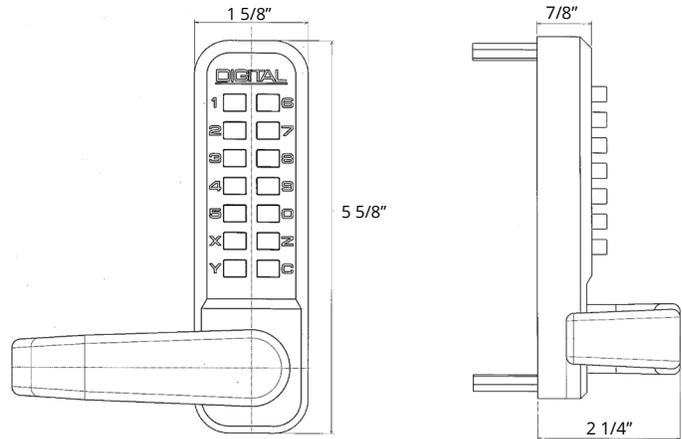

ORDERING INFORMATION

Finish	Single Combination	Double Combination
Antique Brass	2985AB	2985ABDC
Bright Brass	2985BB	2985BBDC
Bright Chrome	2985BC	2985BCDC
Jet Black	2985JB	2985JBDC
Marine Grade	2985MG	2985MGDC
Oil Rubbed Bronze	2985OIL	2985OILDC
Satin Chrome	2985SC	2985SCDC
Satin Nickel	2985SN	2985SNDC
White	2985WH	2985WHDC





FEATURES

- Mechanical, keyless deadbolt lock
- One user code
- Oversized knob on exterior and interior
- Reversible handing
- Adjustable backset deadbolt
- Covers standard 2 1/8" hole
- Marine Grade Finish

OPTIONS

Single Combination, Double Combination



Single Combination



Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:

- Length: 6 1/4"
- Width: 1 3/4"
- Depth: 2"

Total Coverage with Trim Plates: 6 3/4" L x 2 1/4" W x 2 1/8" D

Door Thickness: 1 1/8" to 2", up to 5" with Extension Kit

Material: Zinc-plated steel

Teflon coated stainless steel interior components


Teflon coated with Marine Grade Finish

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

The 3210 is only available in Marine Grade finish. The finish closely resembles the color of a Satin Chrome (26D) finish lock. We recommend the Marine Grade Finish for saltwater environments where the lock will sustain consistent exposure to the elements. It has a much longer lifetime than a standard finish and provides added strength against the corrosive elements of coastal/saltwater environments.

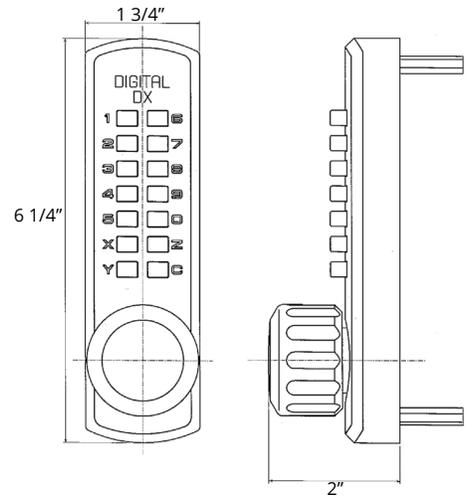

ORDERING INFORMATION

Finish	Single Combination	Double Combination
Marine Grade	3210	3210DC





FEATURES

- Mechanical, keyless deadlocking spring latch
- One user code
- Oversized knob on exterior and interior
- Reversible handing
- Adjustable backset
- Covers standard 2 1/8" hole
- Marine Grade Finish

OPTIONS

Single Combination, Double Combination



Single Combination



Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:

- Length: 6 1/4"
- Width: 1 3/4"
- Depth: 2"

Total Coverage with Trim Plates: 6 3/4" L x 2 1/4" W x 2 1/8" D

Door Thickness: 1 1/8" to 2", up to 5" with Extension Kit

Material: Zinc-plated steel

Teflon coated stainless steel interior components


Teflon coated with Marine Grade Finish

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

The 3230 is only available in Marine Grade finish. The finish closely resembles the color of a Satin Chrome (26D) finish lock. We recommend the Marine Grade Finish for saltwater environments where the lock will sustain consistent exposure to the elements. It has a much longer lifetime than a standard finish and provides added strength against the corrosive elements of coastal/saltwater environments.

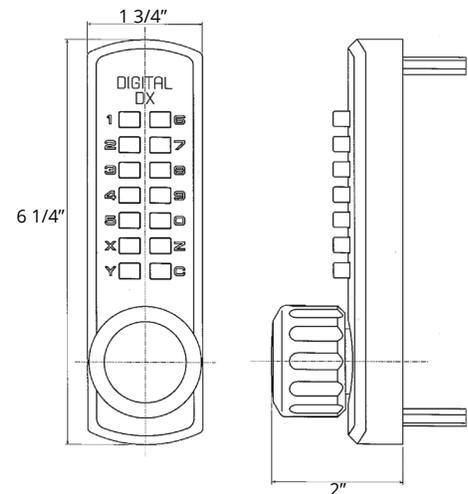

ORDERING INFORMATION

Finish	Single Combination	Double Combination
Marine Grade	3230	3230DC





FEATURES

- Mechanical, keyless, surface mount deadbolt
- Reversible long/short bar
- One user code
- Low profile
- Ideal for light-duty applications
- Compatible with:**
- C-25 Pull Handle (sold separately)
- C-25 Pull Handle not available in BB or MG



DIMENSIONS & SPECIFICATIONS

Exterior Dimensions:

- Length: 5"
- Width: 1 1/8"
- Depth: 1 3/4"

Interior Dimensions:

- Length: 5"
- Width: 1 1/8"
- Depth: 1 3/8"

Throw: 3/4"

Door Thickness: 1 1/8" to 2"


Fits doors 1/8" thick and up with Thin Door Kit

Fits doors up to 5" thick with Extension Kit

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

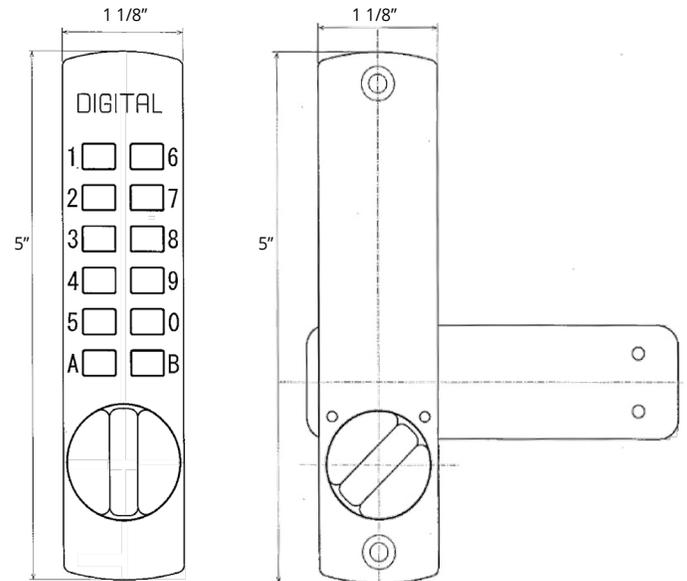

ORDERING INFORMATION

Finish

- Antique Brass
- Bright Brass
- Jet Black
- Marine Grade
- Oil Rubbed Bronze
- Satin Chrome
- Satin Nickel
- White

Order

- C120AB
- C120BB
- C120JB
- C120MG
- C120OIL
- C120SC
- C120SN
- C120WH





FEATURES

- Mechanical, keyless, hook bolt
- Surface mount lock
- One user code
- Low profile
- Ideal for sliding glass doors
- Compatible with:**
- C-25 Pull Handle (sold separately)
- C-25 Pull Handle not available in BB or MG



DIMENSIONS & SPECIFICATIONS

Exterior Dimensions:

- Length: 5"
- Width: 1 1/8"
- Depth: 1 3/4"

Interior Dimensions:

- Length: 5"
- Width: 1 1/8"
- Depth: 1 1/2"

Throw: 3/8"

Door Thickness: 1 1/8" to 2"


Fits doors 1/8" thick and up with Thin Door Kit

Fits doors up to 5" thick with Extension Kit

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

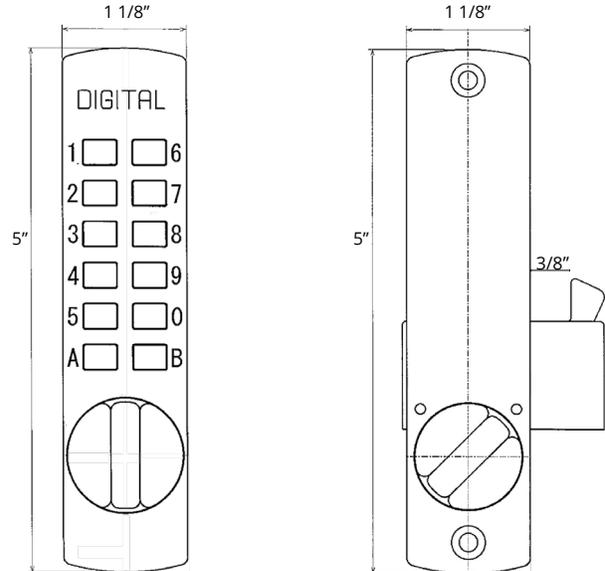

ORDERING INFORMATION

Finish

- Antique Brass
- Bright Brass
- Jet Black
- Marine Grade
- Oil Rubbed Bronze
- Satin Chrome
- Satin Nickel
- White

Order

- C150AB
- C150BB
- C150JB
- C150MG
- C150OIL
- C150SC
- C150SN
- C150WH





FEATURES

- Mechanical, keyless, push button lock
- Surface mount cam lock
- Ideal for cabinet doors
- One user code
- Low profile
- Compatible with:**
- C-25 Pull Handle (sold separately)
- C-25 Pull Handle not available in BB or MG



DIMENSIONS & SPECIFICATIONS

Exterior Dimensions:


- Length: 5"
- Width: 1 1/8"
- Depth: 1 3/4"

Interior Dimensions:

- Length: 5"
- Width: 1 1/8"
- Depth: 1 1/4"

Door Thickness: 1 1/8" to 2"

- Fits doors 1/8" thick and up with Thin Door Kit
- Fits doors up to 5" thick with Extension Kit
- For Exterior & Interior Use
- Weather Resistant
- Lifetime Mechanical Warranty

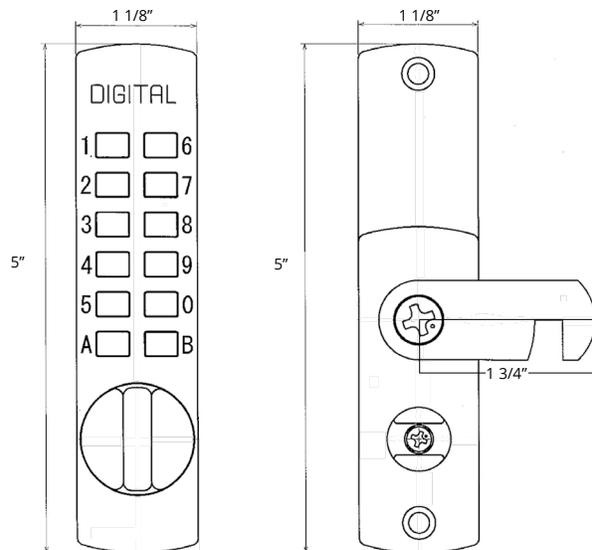

ORDERING INFORMATION

Finish

- Antique Brass
- Bright Brass
- Jet Black
- Oil Rubbed Bronze
- Satin Chrome
- Satin Nickel
- White

Order

- C170AB
- C170BB
- C170JB
- C170OB
- C170SC
- C170SN
- C170WH





FEATURES

- Electronic deadbolt lock
- Battery powered (4-AA Alkaline)
- Up to six unique user codes
- Disposable (one-time use) code capable
- Customizable programming code
- Auto-locking function
- LED illumination
- Key override
- Visual and audible confirmations
- Remote compatible (up to 5 remotes, sold separately)



Remote Control (sold separately)

DIMENSIONS & SPECIFICATIONS

Exterior Dimensions:

- Length: 5 1/2"
- Width: 3 1/8"
- Depth: 1 3/16"

Interior Dimensions:

- Length: 7 1/4"
- Width: 2 3/4"
- Depth: 1 3/4"

Door Thickness: 1 3/8" to 2"

Material: Stainless steel

Deadbolt: Adjustable backset deadbolt



Cylinder: 5 pin Schlage keyway

Power: 4 AA Alkaline batteries

Keys Included: 2

Weather Resistant Exterior Lock Body

Inside Lock Body for Interior Use Only

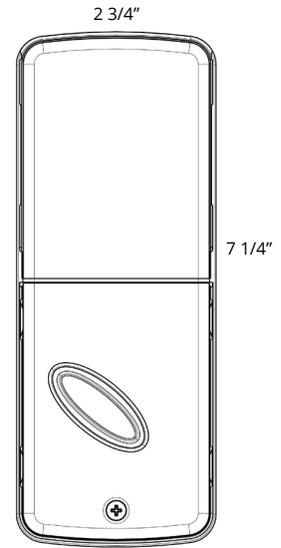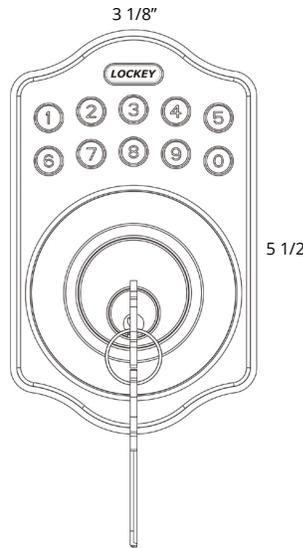

ORDERING INFORMATION

Finish

- Antique Brass
- Bright Brass
- Satin Chrome
- Satin Nickel
- Antique Bronze

Order

- E910AB
- E910BB
- E910SC
- E910SN
- E910ABZ





FEATURES

- Remote Capable (1 remote included, up to 5 capable)
- Electronic deadbolt lock
- Battery powered (4-AA Alkaline)
- Up to six unique user codes
- Disposable (one-time use) code capable
- Customizable programming code
- Auto-locking function
- LED illumination
- Key override
- Visual and audible confirmations

OPTIONS

- Antique Brass
- Bright Brass
- Satin Nickel
- Antique/Oil Rubbed Bronze



Remote Control

DIMENSIONS & SPECIFICATIONS

Exterior Dimensions:

- Length: 5 1/8"
- Width: 3 1/8"
- Depth: 1 3/8"

Interior Dimensions:

- Length: 7 1/4"
- Width: 2 7/8"
- Depth: 1 3/4"

Door Thickness: 1 3/8" to 1 3/4"

Material: Stainless steel

Latch: Adjustable


Cylinder: 5 pin Schlage keyway

Power: 4 AA Alkaline batteries

Keys Included: 2

Weather Resistant Exterior Lock Body

Inside Lock Body for Interior Use Only

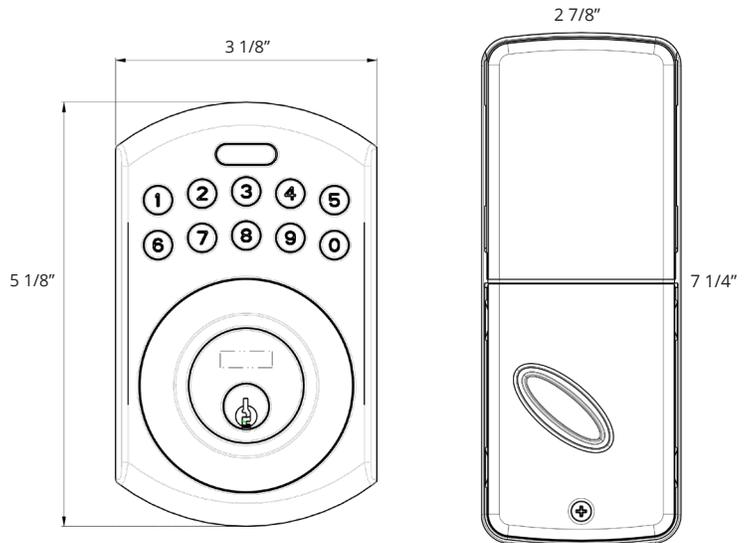

ORDERING INFORMATION

Finish	Order #
Antique Brass	E915AB
Bright Brass	E915BB
Satin Nickel	E915SN
Antique/Oil Rubbed Bronze	E915OIL





FEATURES

- Electronic knob lock
- Adjustable latch backset
- Battery powered (4-AA Alkaline)
- Up to six unique user codes
- Disposable (one-time use) code capable
- Auto-locking function
- LED illumination
- Key override
- Visual and audible confirmations
- Remote compatible (up to 5 remotes, sold separately)

OPTIONS



Remote Control (sold separately)

DIMENSIONS & SPECIFICATIONS

Exterior Dimensions:

- Length: 5 1/2"
- Width: 3 1/8"
- Depth: 1 3/16"

Interior Dimensions:

- Length: 7 1/4"
- Width: 2 3/4"
- Depth: 1 3/4"

Door Thickness: 1 3/8" to 1 3/4"

Material: Stainless steel

Latch: Adjustable


Cylinder: 5 pin Schlage keyway

Power: 4 AA Alkaline batteries

Keys Included: 2

Weather Resistant Exterior Lock Body

Inside Lock Body for Interior Use Only

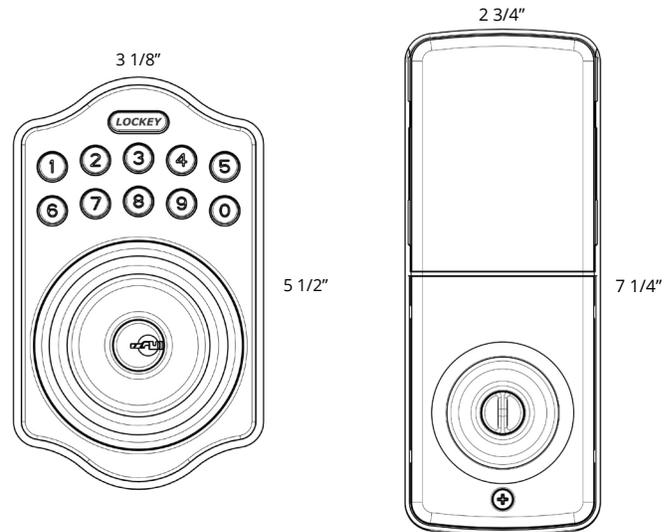

ORDERING INFORMATION

Finish

- Antique Brass
- Bright Brass
- Satin Chrome
- Satin Nickel
- Antique Bronze

Order

- E930AB
- E930BB
- E930SC
- E930SN
- E930ABZ





FEATURES

- Electronic lever lock
- Adjustable latch backset
- Battery powered (4 AA Alkaline)
- Up to six unique user codes
- Disposable (one-time use) code capable
- Auto-locking function
- LED illumination
- Key override
- Visual and audible confirmations
- Remote compatible (up to 5 remotes, sold separately)

OPTIONS



Remote Control (sold separately)

DIMENSIONS & SPECIFICATIONS

Exterior Dimensions:

- Length: 5 1/2"
- Width: 3 1/8"
- Depth: 1 3/16"

Interior Dimensions:

- Length: 7 1/4"
- Width: 2 3/4"
- Depth: 1 3/4"

Door Thickness: 1 3/8" to 1 3/4"

Material: Stainless steel

Latch: Adjustable


Cylinder: 5 pin Schlage keyway

Power: 4 AA Alkaline batteries

Keys Included: 2

Weather Resistant Exterior Lock Body

Inside Lock Body for Interior Use Only

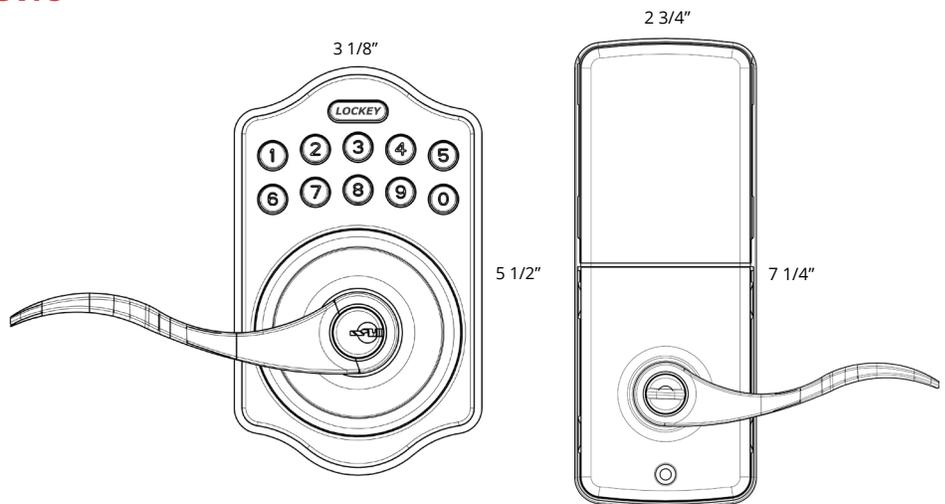

ORDERING INFORMATION

<u>Finish</u>	<u>Order #</u>
Antique Brass	E985AB
Bright Brass	E985BB
Satin Chrome	E985SC
Satin Nickel	E985SN
Antique Bronze	E985ABZ





FEATURES

- Remote Capable (1 remote included, up to 5 capable)
- Electronic lever lock
- Adjustable latch backset
- Battery powered (4 AA Alkaline)
- Up to six unique user codes
- Disposable (one-time use) code capable
- Auto-locking function
- LED illumination
- Key override
- Visual and audible confirmations

OPTIONS

- Antique Brass
- Bright Brass
- Satin Nickel
- Antique/Oil Rubbed Bronze



Remote Control

DIMENSIONS & SPECIFICATIONS

Exterior Dimensions:

- Length: 5 1/8"
- Width: 3 1/8"
- Depth: 2 5/8"

Interior Dimensions:

- Length: 7 1/2"
- Width: 2 7/8"
- Depth: 3 3/8"

Door Thickness: 1 3/8" to 1 3/4"

Material: Stainless steel

Latch: Adjustable


Cylinder: 5 pin Schlage keyway

Power: 4 AA Alkaline batteries

Keys Included: 2

Weather Resistant Exterior Lock Body

Inside Lock Body for Interior Use Only

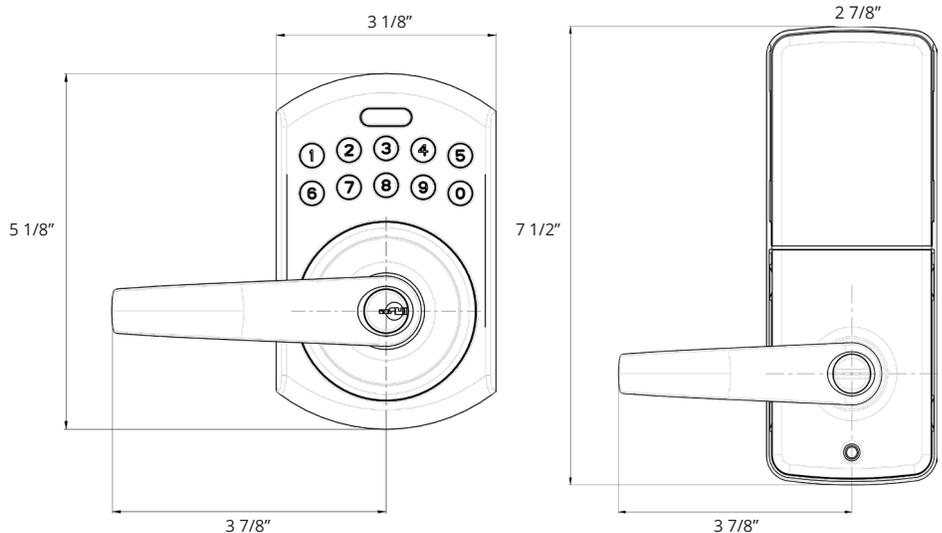

ORDERING INFORMATION

Finish

- Antique Brass
- Bright Brass
- Satin Nickel
- Antique/Oil Rubbed Bronze

Order #

- E995AB
- E995BB
- E995SN
- E995OIL





FEATURES

Bluetooth connectivity (up to 70 feet)



BLE Smart Lock App

Apple App Store

Google Play Store

- Electronic deadbolt lock
- Battery powered (4-AA Alkaline)
- Up to six unique user codes
- Disposable (one-time use) code capable
- Customizable programming code
- Auto-locking function
- LED illumination
- Key override
- Visual and audible confirmations

OPTIONS

- Antique Brass
- Bright Brass
- Satin Nickel
- Antique/Oil Rubbed Bronze

DIMENSIONS & SPECIFICATIONS

Exterior Dimensions:

Length: 5 1/8"

Width: 3 1/8"

Depth: 1 3/8"

Interior Dimensions:

Length: 7 1/4"

Width: 2 7/8"

Depth: 1 3/4"

Door Thickness: 1 3/8" to 1 3/4"

Material: Stainless steel

Latch: Adjustable


Cylinder: 5 pin Schlage keyway

Power: 4 AA Alkaline batteries

Keys Included: 2

Weather Resistant Exterior Lock Body

Inside Lock Body for Interior Use Only

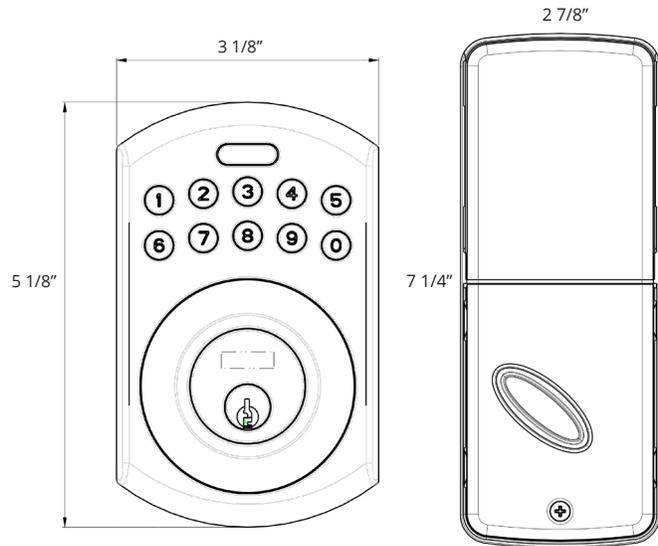

ORDERING INFORMATION

Finish

Antique Brass

Bright Brass

Satin Nickel

Antique/Oil Rubbed Bronze

Order

EB915AB

EB915BB

EB915SN

EB915OIL





FEATURES

- Public, Private & Remote Allocation System (RAS) mode
- Key override
- Up to 80,000 cycles per pair of AA batteries
- Batteries included
- Battery condition indicator
- Audible keypad (can be turned on/off)
- 8 digit master code
- 6 digit sub-master code
- 4 digit user codes
- 6 digit technician code
- Auto unlock mode (can be turned on/off)

OPTIONS

- Finishes:** Black (B), Silver (S), White (W), Custom*
- Keypad Direction:** Vertical (V), Right (R), Left (L)
- Push to Lock SLAM Latch (3)
- Remote Allocation System (RAS)

DIMENSIONS & SPECIFICATIONS

External Dimensions:

- Length: 136mm (5.35")
- Width: 37mm (1.46")
- Depth: 27mm (1.06")

Mounting Hole Shape: 2 or 3 point mounting

Spindle Length: 20mm standard, 24mm by special order*

Power: 2 x AA Battery (Alkaline)

Operations: Up to 80,000 cycles per pair of AA batteries

Low Battery: LED lights with battery condition indicator


Material: Zinc diecast

Finish: Powder coated

Standard Cam Capability: 1/4" to 1 1/2"

Keys Included: 2

For Internal Use

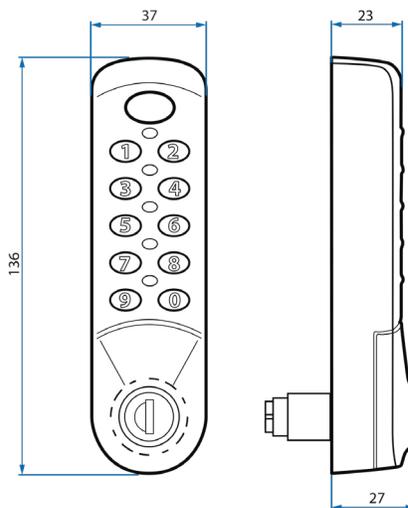

Optional
SLAM Latch (3):



ORDERING INFORMATION

Order # for EC780 shown above is EC780SV

<u>Order #</u>	<u>Finish</u>	<u>Keypad Direction</u>	<u>SLAM Latch</u>	<u>RAS</u>
EC780	(B) Black (S) Silver (W) White	(V) Vertical (R) Right (L) Left	3	RAS

*Contact LockeyUSA for minimum order quantities and lead times for custom orders.



FEATURES

- Suitable for chlorinated environments
- Public, Private & Remote Allocation System (RAS) mode
- Key override
- Up to 80,000 cycles per pair of AA batteries
- Batteries included
- Battery condition indicator
- Audible keypad (can be turned on/off)
- 8 digit master code
- 6 digit sub-master code
- 4 digit user codes
- 6 digit technician code
- Auto unlock mode (can be turned on/off)
- Technician mode

OPTIONS

- Finishes:** Black (B), Silver (S), White (W), Custom*
- Keypad Direction:** Vertical (V), Right (R), Left (L)
- ADA Wet Area Kit (A)
- Remote Allocation System (RAS)

DIMENSIONS & SPECIFICATIONS

External Dimensions:

- Length: 140mm (5 1/2")
- Width: 41mm (1.61")
- Depth: 32.5mm (1.28")

Mounting Hole Shape: 2 or 3 point mounting (see technical drawing)

Spindle Length: 16mm standard, 20mm by special order*

Power: 2 x AA Battery (Alkaline)

Operations: Up to 80,000 cycles per pair of AA batteries

Low Battery: LED lights with battery condition indicator


Material: Zinc diecast

Finish: Powder coated

Standard Cam Capability: 1/4" to 1 1/2"

Keys Included: 2

IP65 Rated

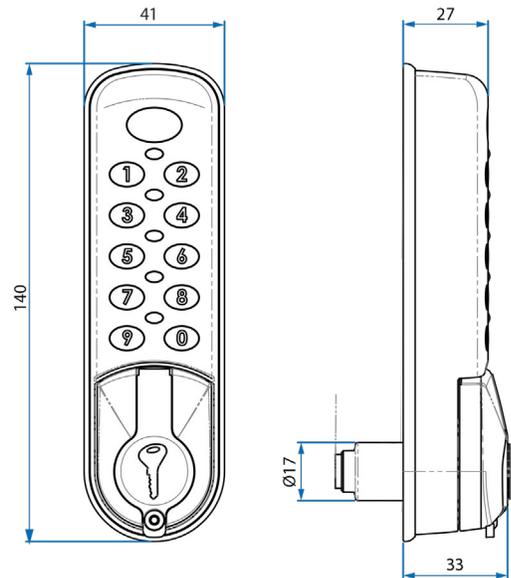

ORDERING INFORMATION

Order # for EC781 shown above is EC781BV

Order #	Finish	Keypad Direction	ADA Kit	RAS
EC781	(B) Black (S) Silver (W) White Custom*	(V) Vertical (R) Right (L) Left	A	RAS

*Contact LockeyUSA for minimum order quantities and lead times for custom orders.



FEATURES

- ADA Lever Handle
- Public, Private & Remote Allocation System (RAS) mode
- Key override
- Up to 80,000 cycles per pair of batteries
- Batteries included
- Battery condition indicator
- Audible keypad (can be turned on/off)
- 8 digit master code
- 6 digit sub-master code
- 4 digit user codes
- 6 digit technician code
- Auto unlock mode (can be turned on/off)
- Technician mode

OPTIONS

- Finishes:** Black (B), Silver (S), White (W), Custom*
- Keypad Direction:** Vertical (V), Right (R), Left (L)
- Push to Lock SLAM Latch (3)
- Remote Allocation System (RAS)

DIMENSIONS & SPECIFICATIONS

External Dimensions:

- Length: 185.5mm (7.3")
- Width: 37mm (1.46")
- Depth: 28.7mm (1.13")

Mounting Hole Shape: 2 or 3 point mounting (see technical drawing)

Spindle Length: 20mm standard, 24mm by special order*

Power: 2 x AA Battery (Alkaline)

Operations: Up to 80,000 cycles per pair of AA batteries

Low Battery: LED lights with battery condition indicator


Material: Zinc diecast

Finish: Powder coated

Standard Cam Capability: 1/4" to 1 1/2"

Keys Included: 2

For Internal use

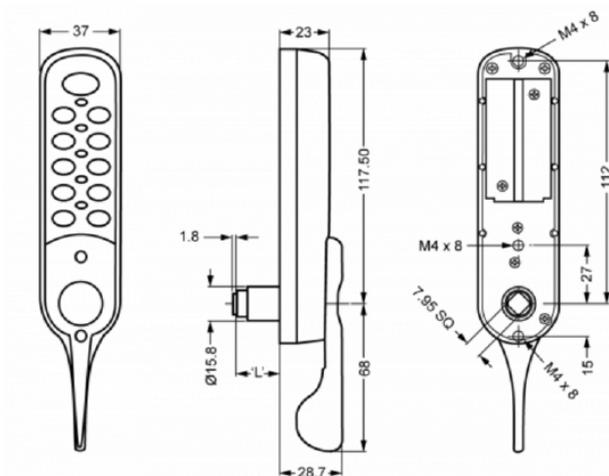

ORDERING INFORMATION

Order # for EC782 shown above is EC782SV

Order #	Finish	Keypad Direction	SLAM Latch	RAS
EC782	(B) Black (S) Silver Custom*	(V) Vertical (R) Right (L) Left	3	RAS

*Contact LockeyUSA for minimum order quantities and lead times for custom orders.



FEATURES

- RFID: Can be paired with existing MIFARE/NFC 13.56MHz systems or used separately
- Public and Private user modes
- Key override
- Up to 80,000 cycles per pair of AA batteries
- Batteries included
- Battery condition indicator
- Audible actuation (can be turned on/off)

PROGRAMMING OPTIONS

Change master card, add user card, delete all user cards, delete single user card (with & without user card), set private mode & public mode, set audio, auto unlock, set read speed mode.

ORDERING OPTIONS


Finishes: Black (B), Silver (S), Custom*
Push to Lock SLAM Latch (3)

DIMENSIONS & SPECIFICATIONS

External Dimensions:

- Length: 136mm (5.35")
- Width: 37mm (1.46")
- Depth: 30mm (1.18")

- Mounting Hole Shape:** 2 or 3 point mounting
- Spindle Length:** 20mm standard, 24mm by special order*
- Power:** 2 x AA Battery (Alkaline)
- Low Battery:** LED lights with battery condition indicator
- Material:** Zinc diecast
- Finish:** Powder coated
- Standard Cam Capability:** 1/4" to 1 1/2"
- Keys Included:** 2
For Internal Use

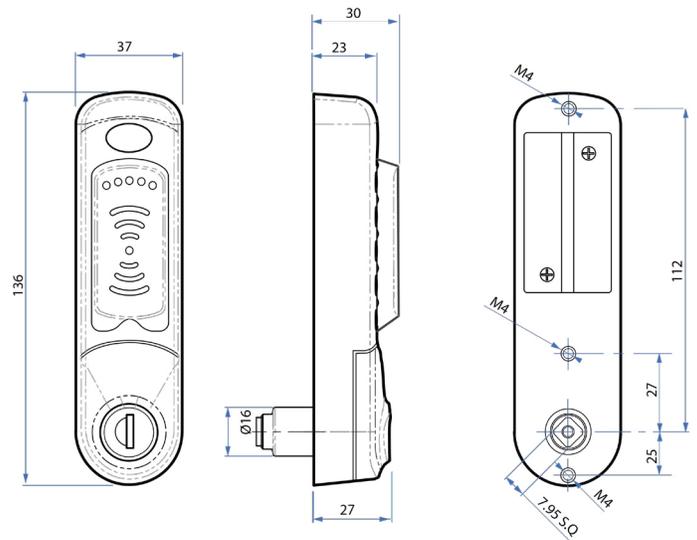

ORDERING INFORMATION

Order # for EC783 shown above is EC783B

Order #	Finish	SLAM Latch
EC783	(B) Black	3
	(S) Silver	
	Custom*	

*Contact LockeyUSA for minimum order quantities and lead times for custom orders.



FEATURES

- Public, Private & Remote Allocation System (RAS) mode
- Key override
- Up to 80,000 cycles per pair of AA batteries
- Batteries included
- Battery condition indicator
- Audible keypad (can be turned on/off)
- 8 digit master code
- 6 digit sub-master code
- 4 digit user codes
- 6 digit technician code
- Auto unlock mode (can be turned on/off)

OPTIONS

- Finishes:** Black (B), Silver (S), Custom*
- Keypad Direction:** Vertical (V), Right (R), Left (L)
- Remote Allocation System (RAS)

DIMENSIONS & SPECIFICATIONS

External Dimensions:

- Length: 143.5mm (5.65")
- Width: 41mm (1.61")
- Depth: 11.5mm (.45")

Internal Dimensions:

- Length: 142mm (5.6")
- Width: 42.6mm (1.68")
- Depth: 37.5mm (1.48")

Mounting Hole Shape: 3 point mounting (see technical drawing)

Spindle Length: 20mm standard, 24mm by special order*

Power: 2 x AA Battery (Alkaline)


Low Battery: LED lights with battery condition indicator

Material: Zinc diecast

Finish: Powder coated

Keys Included: 2

For Internal Use

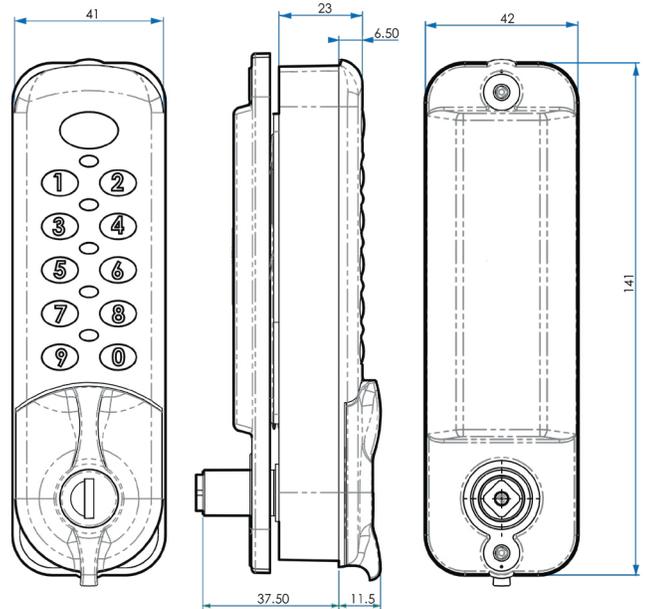

ORDERING INFORMATION

Order # for EC784 shown above is EC784BV

Order #	Finish	Keypad Direction	RAS
EC784	(B) Black	(V) Vertical	RAS
	(S) Silver	(R) Right	
	Custom*	(L) Left	

*Contact LockeyUSA for minimum order quantities and lead times for custom orders.



FEATURES

- RFID: Can be paired with existing MIFARE/NFC 13.56MHz systems or used separately
- Flush fit
- Public or private user modes
- Key override
- Up to 80,000 cycles per pair of AA batteries
- Batteries included
- Battery condition indicator
- Audible actuation

PROGRAMMING OPTIONS

Change master card, add user card, delete all user cards, delete single user card (with & without user card), set private mode & public mode, set audio, auto unlock, set read speed mode.

ORDERING OPTIONS

Finishes: Silver (S), Black (B), Custom*

DIMENSIONS & SPECIFICATIONS

External Dimensions:

- Length: 143.5mm (5.65")
- Width: 41mm (1.61")
- Depth: 13.5mm (.53")

Internal Dimensions:

- Length: 141.6mm (5.57")
- Width: 42.6mm (1.68")
- Depth: 37.5mm (1.48")

Mounting Hole Shape: 3 point mounting

Spindle Length: 20mm standard, 24mm by special order*

Power: 2 x AA Battery (Alkaline)


Low Battery: LED indicator lights with battery condition indicator

Material: Zinc diecast

Finish: Powder coated

Keys Included: 2

For Internal Use

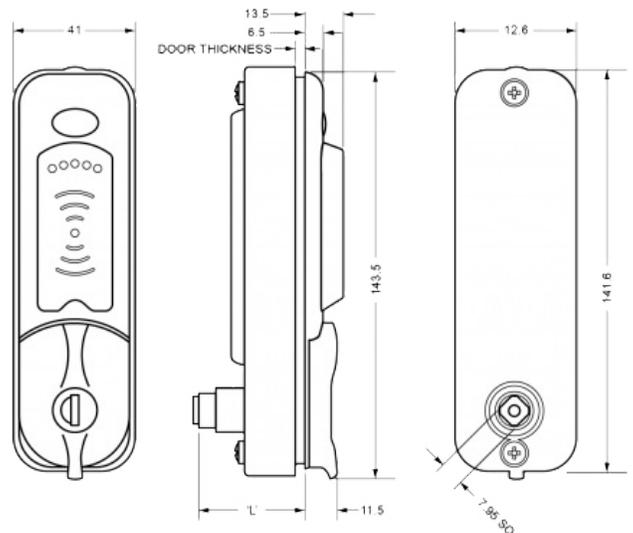

ORDERING INFORMATION

Order # for EC785 shown above is EC785S

Order #	Finish
EC785	(B) Black
	(S) Silver
	Custom*

*Contact LockyUSA for minimum order quantities and lead times for custom orders.



FEATURES

- Public, Private & Remote Allocation System (RAS) mode
- Fits most standard metal lockers "out of the box"
- Simple click together fit, with 2 nuts to secure
- Designed to work with locking bar lifter
- ADA compliant as standard
- Key override
- Up to 80,000 operations per pair of batteries (included)
- Battery condition indicator
- Audible key press (can be turned on/off)
- Re-lock indicator
- 4 digit user code (can be set by user)
- 8 digit master code
- 6 digit technician code

OPTIONS

- Finishes: Silver (S), Black (B), Custom*
- Remote Allocation System (RAS)

DIMENSIONS & SPECIFICATIONS

External Dimensions:

- Length: 73.5mm (2.9")
- Width: 52mm (2.05")
- Depth: 28mm (1.1")

Internal Dimensions:

- Length: 67.5mm (2.66")
- Width: 93mm (3.66")
- Depth: 22.4mm (.88")

Power: 2 x AA Battery (Alkaline)

Operations: Up to 80,000 cycles per pair of AA batteries


Low Battery: LED indicator lights with battery condition indicator

Material: Heavy duty zinc die-cast construction

Finish: Powder coated

Keys Included: 2

For Internal Use

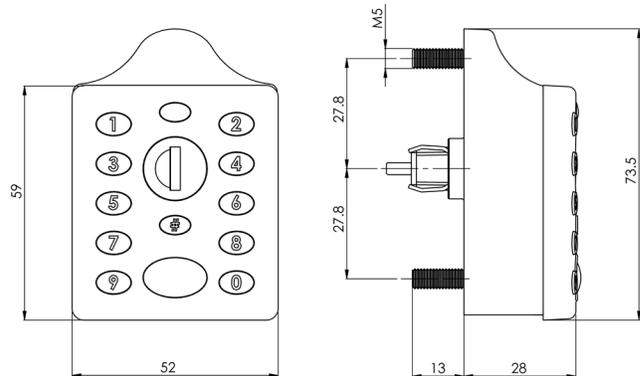

ORDERING INFORMATION

Order # for EC790 shown above is EC790S

Order #	Finish	RAS
EC790	(B) Black	RAS
	(S) Silver	
	Custom*	

*Contact LockeyUSA for minimum order quantities and lead times for custom orders.



FEATURES

- Public, Private & Remote Allocation System (RAS) mode
- Fits most standard metal lockers "out of the box"
- Simple click together fit, with 2 nuts to secure
- Designed to work with locking bar lifter
- ADA compliant as standard
- Key override
- Up to 80,000 operations per pair of batteries (included)
- Battery condition indicator
- Audible key press (can be turned on/off)
- Re-lock indicator
- 4 digit user code (can be set by user)
- 8 digit master code
- 6 digit technician code

OPTIONS

- Finishes: Silver (S), Black (B), Custom*
- Remote Allocation System (RAS)

DIMENSIONS & SPECIFICATIONS

External Dimensions:

- Length: 73.5mm (2.9")
- Width: 52mm (2.05")
- Depth: 28mm (1.1")

Internal Dimensions:

- Length: 67.5mm (2.66")
- Width: 93mm (3.66")
- Depth: 22.4mm (.88")

Power: 2 x AA Battery (Alkaline)

Operations: Up to 80,000 cycles per pair of AA batteries


Low Battery: LED indicator lights with battery condition indicator

Material: Heavy duty zinc die-cast construction

Finish: Powder coated

Keys Included: 2

For Internal Use

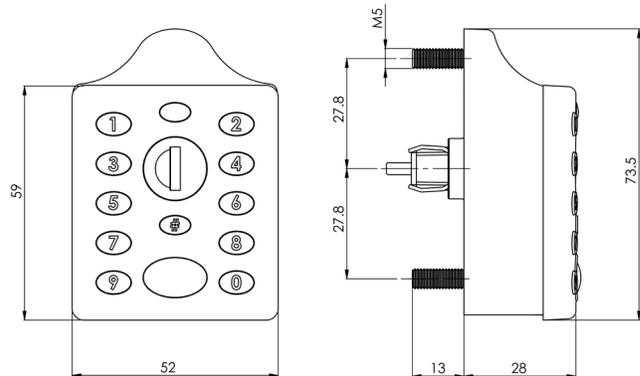

ORDERING INFORMATION

Order # for EC790 shown above is EC790S

Order #	Finish	RAS
EC790	(B) Black	RAS
	(S) Silver	
	Custom*	

*Contact LockeyUSA for minimum order quantities and lead times for custom orders.

EC SERIES USER MODES: PUBLIC, PRIVATE, & RAS

Locks in the **Electronic Cabinet and Locker Lock Series** are available in three user modes: Public, Private, and Remote Allocation System mode (RAS).

PUBLIC MODE

User code is lost when opened.

Commonly used for locks on shared spaces such as in fitness locker rooms, shared work spaces, festivals and amusement parks.

TO SET IN PUBLIC MODE:
[LOGO] [MASTER CODE] [08]

TO LOCK:

1. Select the open locker, cabinet or drawer.
2. Place items inside and close the door.
3. Enter any four digit code.
4. Re-enter the same four digit code.
5. It is now locked.

TO UNLOCK:

1. Return to the lock.
2. Enter your four digit code on the keypad.
3. The lock is now unlocked.

PRIVATE MODE

User code is retained when opened.

Commonly used for locks on cabinets, lockers, drawers and other applications in non-shared spaces. The lock is assigned to an individual user.

TO SET IN PRIVATE MODE:
[LOGO] [MASTER CODE] [09] [NEW USER CODE]

TO UNLOCK:

1. Enter assigned four digit code.
2. Place items inside.

TO LOCK:


1. Close the door.

The lock **automatically** re-locks after four seconds and engages when the locker door is closed.

REMOTE ALLOCATION SYSTEM

User code is managed online.

The Remote Allocation System (RAS) is an online code management system available on all keypad locks in the Electronic Cabinet & Locker Series. With **RAS**, administrators can remotely manage all locks without ever having to go to the lock itself!

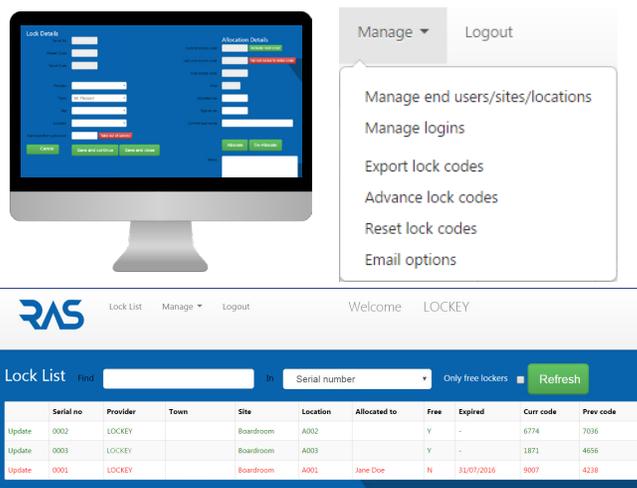

Through the online portal, administrators can view a detailed overview of all the locks they currently manage. The lock list provides information such as the serial number, location of the lock and who the lock is currently allocated to.

Change many or all lock codes at once!

1. Select locks to be updated.

2. Click "Manage."

3. Click "Advance lock codes."

The next user code is now available!

Administrators can manage a single lock by clicking "Update," which can be found on the far left side of the lock list. This will allow the administrator to see all details of the lock.

From the lock details page, administrators can manage, amend and update all aspects of the individual lock.

Administrators can advance the lock code, reallocate the lock to a different user, and edit all aspects of the lock details with the **Remote Allocation System**.



FEATURES

- Electronic cam lock
- Public and private user modes
- Can be flush fitted or surface mounted
- Emergency Key Override (7 Disc Barrel)
- LED Indicator Lights
- 10 Button Keypad:
 - 8-digit master code
 - 6-digit sub-master code
 - 4-digit user code
- Technician Mode
- Secured with 2 x M4 Pan Head Screws

OPTIONS

Finishes:
 Black (B)
 Silver (S)
 White (W)
 Custom*

Keypad Direction:
 Vertical (V)
 Right Handed Horizontal (R)
 Left Handed Horizontal (L)*

DIMENSIONS & SPECIFICATIONS

Dimensions:

Body Length: 94mm (3.7")
 Head Depth: 32mm (1 1/4")

Power: 1/2 AA Battery


Low Battery: LED indicator lights with battery condition indicator

Material: Zinc Alloy and ABS Construction

Finish: Powder coated

Keys Included: 2

For Internal Use

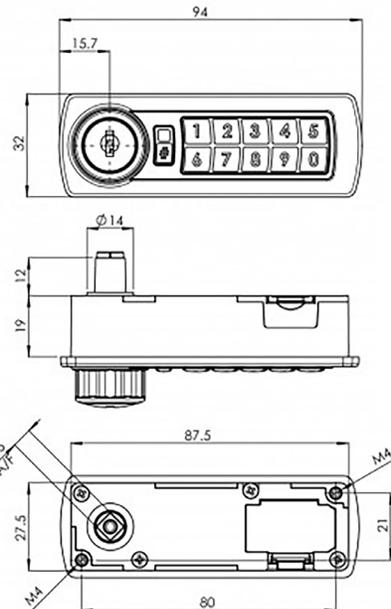

Flush Fit Clamp Box



Surface Mount Sleeve

ORDERING INFORMATION

Finish	Vertical	Right
Black	GE370VB	GE370RB
Silver	GE370VS	GE370RS
White	GE370VW	GE370RW



*Contact LockeyUSA for minimum order quantities and lead times for custom orders.

FEATURES

- Mechanical cam lock
- 4 Wheel Combination Lock
- 10,000 possible combinations
- Can be flush fitted or surface mounted
- Emergency Key Override (7 Disc Barrel)
- Code Finding Feature (7 Disc Barrel)
- Code Change Function
- Code Finding Feature
 - 7 Disc Barrel
 - Allows emergency access if code is lost
- Secured with 2 x M4 Pan Head Screws

OPTIONS

- Finishes:**
- Black (B)
 - Silver (S)
 - White (W)
 - Custom*

- Keypad Direction:**
- Vertical (V)
 - Right Handed Horizontal (R)
 - Left Handed Horizontal (L)*



DIMENSIONS & SPECIFICATIONS

Dimensions:

- Body Length: 94mm (3.7")
- Head Depth: 32mm (1 1/4")

Material: Zinc Alloy and ABS Construction

Finish: Powder coated


Keys Included: 2
For Internal Use



Flush Fit Clamp Box



Surface Mount Sleeve

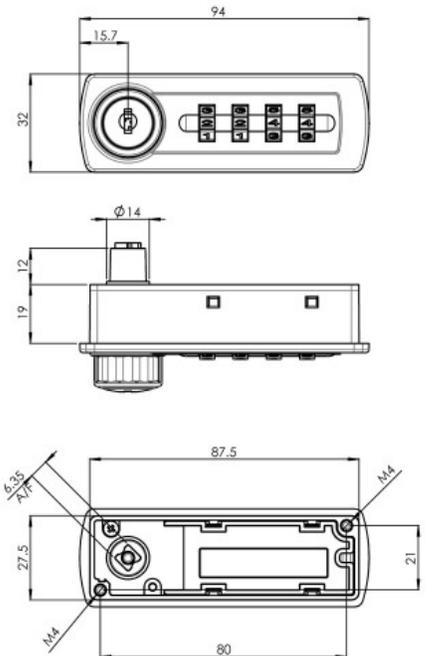

ORDERING INFORMATION

Finish	Vertical	Right
Black	GM270VB	GM270RB
Silver	GM270VS	GM270RS
White	GM270VW	GM270RW



*Contact LockeyUSA for minimum order quantities and lead times for custom orders.



FEATURES

- Add-on key override system (KOS)
- Compatible with 2000 and 2900 series locks
- Schlage keyway
- Available keyed alike or keyed different
- Three keys included
- KOS and lock sold separately (KOS shown below)

COMPATIBLE WITH

2000 SERIES:	2900 SERIES:
2200	2900
2210	2900DC
2210DC	2930
2500	2930DC
2830	2950
2830DC	2950DC
2835	2985
2835DC	2985DC



DIMENSIONS & SPECIFICATIONS

KOS Dimensions:

- Length: 8 1/16"
- Width: 2 1/2"
- Depth: 2"

Dimensions with 2835 & KOS 2835 Installed:

- Length: 8 1/16"
- Width: 2 1/2"
- Depth: 2 3/4"

Door Thickness: 1 1/8" to 2", up to 5" with Extension Kit


Material: Aluminum

Reversible Handing

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

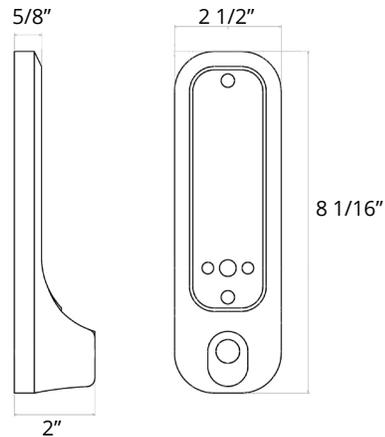

ORDERING INFORMATION

Finish	2835/2985 KOS	KOS
Antique Brass	KOS2835AB	KOS-AB
Jet Black	KOS2835JB	KOS-JB
Marine Grade	KOS2835MG	KOS-MG
Oil Rubbed Bronze	KOS2835OB	KOS-OB
Satin Chrome	KOS2835SC	KOS-SC
Satin Nickel	KOS2835SN	KOS-SN
White	KOS2835WH	KOS-WH





GB2900 LINX

Stainless Steel Gate Box
Lock sold separately
No welding required

Compatible with:

2900
2930
2950
2985

Post Size:

1 5/8" (standard)
1 7/8"

Order #:

GB2900 LINX
GB2900 LINX 1 7/8"



TB-LINX

Mounting kit for chain link gates

Compatible with:

TB200 TB250
TB400 TB450
TB600 TB650

Includes:

- (1) Post-Bracket
- (1) U-Bolt
- (2) Machine Screws
- (4) Lock Nuts

Post Size:

2-3"
4"

Order #:

TB-LINX
TB-LINX-4



TB-950 LINX

Mounting kit for chain link gates

Compatible with:

TB950

Includes:

- (2) Post-Brackets
- (2) U-Bolts
- (2) Weldable Plates
- (4) Lock Nuts

Post Size:

2-3"

Order #:

TB950-LINX



FEATURES

- Mechanical, keyless deadbolt lock
- Installs in minutes with EZ plates
- One user code
- Thumbturn on interior and exterior
- Changeable handing
- Adjustable deadbolt backset
- Covers standard 2 1/8" hole

OPTIONS

Single Combination, Double Combination (DC)



Single Combination

Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:

- Length: 4 7/8"
- Width: 1 1/2"
- Depth: 1 3/4"

Total Coverage with Trim Plates: 5 5/8" L x 2 1/2" W

Backset: Adjustable

Door Thickness: 1 3/16" to 2", up to 5" with Extension Kit

Door Prep Edge Bore: 1"


Material: Zinc-plated steel

Teflon coated stainless steel interior components

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

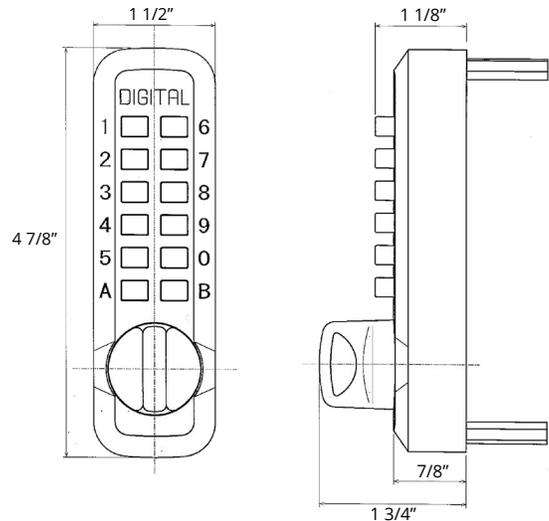

ORDERING INFORMATION

Finish	Single Combination	Double Combination
Antique Brass	M210AB	M210ABDC
Bright Brass	M210BB	M210BBDC
Bright Chrome	M210BC	M210BCDC
Jet Black	M210JB	M210JBDC
Marine Grade	M210MG	M210MGDC
Oil Rubbed Bronze	M210OB	M210OBDC
Satin Chrome	M210SC	M210SCDC
Satin Nickel	M210SN	M210SNDC
White	M210WH	M210WHDC





FEATURES

- Mechanical, keyless deadbolt
- Surface/Rim mount
- One user code
- Thumb turn on exterior and interior
- Changeable handing
- Reversible long/short bar
- Ideal for narrow stile doors & cabinets
- Deadbolt throws 3/4"
- Works on most hinged doors

OPTIONS

- Finishes:**
- Antique Brass
 - Bright Brass
 - Jet Black
 - Marine Grade
 - Satin Chrome
 - Satin Nickel
 - White

DIMENSIONS & SPECIFICATIONS

Dimensions:

- Length: 4 7/8"
- Width: 1 1/2"
- Depth: 1 3/4"

Long Throw Bar: 2 1/4"

Short Throw Bar: 7/8"

Door Thickness: 1 1/8" to 2"

Fits doors 1/8" thick and up with Thin Door Kit

Fits doors up to 5" thick with Extension Kit


Material: Zinc-plated steel

Teflon coated stainless steel interior components

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

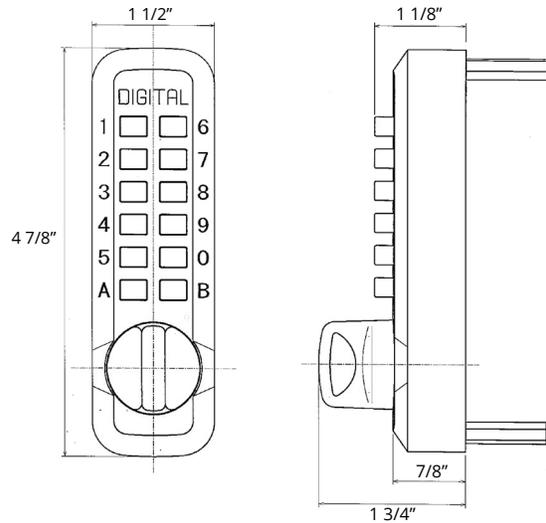

ORDERING INFORMATION

Finish	Order #
Antique Brass	M220AB
Bright Brass	M220BB
Jet Black	M220JB
Marine Grade	M220MG
Satin Chrome	M220SC
Satin Nickel	M220SN
White	M220WH





FEATURES

- Mechanical, keyless deadlocking spring latch lock
- Automatically locks when door is closed
- One user code
- Knob on exterior, thumbturn on interior
- Changeable handing
- Adjustable backset latch
- Covers standard 2 1/8" hole

OPTIONS

Single Combination, Double Combination (DC)



Single Combination



Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:

- Length: 4 7/8"
- Width: 1 1/2"
- Depth: 1 7/8"

Total Coverage with Trim Plates: 5 5/8" x 2 1/2"

Door Thickness: 1 3/8" to 2"

Door Prep Edge Bore: 1"


Material: Zinc-plated steel

Teflon coated stainless steel interior components

For Exterior & Interior Use

Weather Resistant

Lifetime Mechanical Warranty

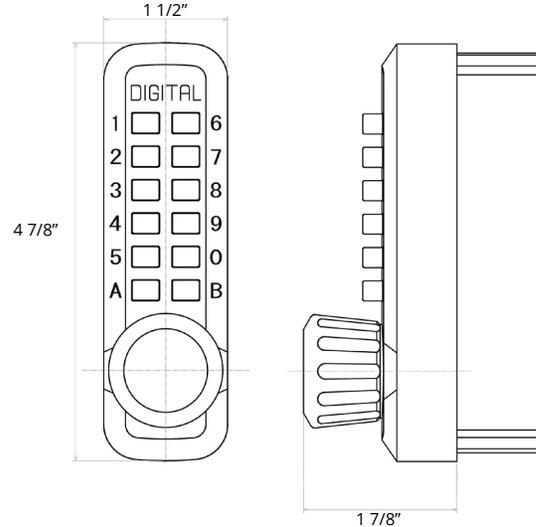

ORDERING INFORMATION

Finish	Single Combination	Double Combination
Antique Brass	M230AB	M230ABDC
Bright Brass	M230BB	M230BBDC
Bright Chrome	M230BC	M230BCDC
Jet Black	M230JB	M230JBDC
Marine Grade	M230MG	M230MGDC
Oil Rubbed Bronze	M230OB	M230OBDC
Satin Chrome	M230SC	M230SCDC
Satin Nickel	M230SN	M230SNDC
White	M230WH	M230WHDC





FEATURES


- Mechanical cam lock
- 4 Wheel Combination
- 10,000 possible combinations
- Key override
- Code Finding Feature
 - 10 Disc barrel with shutter cap
 - Allows emergency access if code is lost
- Code Changing Function
 - Accessible in unlocked position
- Easy Installation

OPTIONS

- Finishes:**
- Black (B)
 - Silver (S)
 - Custom*

DIMENSIONS & SPECIFICATIONS

- Dimensions:** 56mm x 28mm
Nut fixing: 3/4" - 27 UN x 21mm long (16.5mm A/F)
Cam fixing: 8mm Sq. with M4 thread
Material: Zinc die-cast construction
Finish: Powder coated
Keys Included: 2

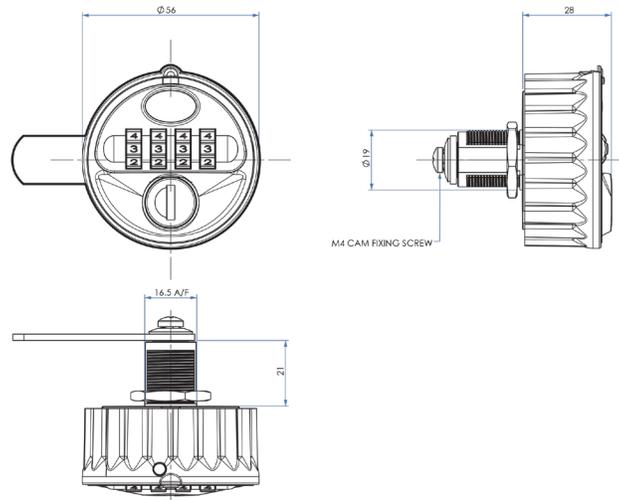


ORDERING INFORMATION

Finish	Order #
Black	MC728B
Silver	MC728S



*Contact LockeyUSA for minimum order quantities and lead times for custom orders.

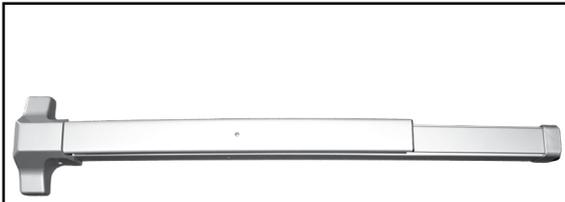

Available LOCKEY Panic Bars:

- Standard: PB1100
- Aluminum: PB1100 AL
- Stainless Steel: PB1100 SS
- Fire Rated: PB1100 FR

For 48" Doors: PB1142
Stainless Steel, for 48" Doors: PB1142 SS

LOCKEY PANIC BARS

Grade 1 Certified ANSI/BHMA A156.3 Series
Complies with ANSI A117.a ADA requirements
UL/cUL Listed

Narrow Stile: 2 1/2"

Door Thickness: 1 3/4" (standard)

Device Length: 33" for 36" doors or 42" for 48" doors

Can be cut down to 27"


Weather Resistant

36" Doors

- PB1100 AL
- PB1100 SS
- PB1100 FR

48" Doors

- PB1142
- PB1142 SS

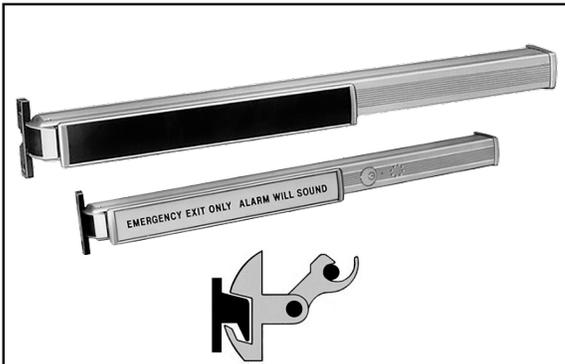

The PB2500 and PB2500 Alarm Bar have a patented double-interlocking system, making it virtually impossible to tamper with, pry, or force open.

PB2500 PANIC BARS

UL Certified ANSI/BHMA 156.3 2008, Grade 1
Listed by CA State Fire Marshall & ADA Compliant
Made in the USA

Weather Resistant

Non-handed

Standard lengths for 36" or 48" doors/gates

Can be field cut for undersized doors/gates

Designed for narrow stile aluminum doors

36" Doors

- PB2500
- PB2500 Alarm

48" Doors

- PB2542
- PB2542 Alarm



Available DETEX Panic Bars:

- Detex V-40
- Detex Alarm Bar: V-40xEB
- Detex Weatherized Alarm Bar: V-40xEBxW

DETEX PANIC BARS

ANSI and BHMA Grade 1 Certified

UL/cUL Listed

ADA Compliant

Narrow Stile: 2 1/2"

Door Thickness: 1 3/4" (standard)

Device Length: 33" for 36" doors or 42" for 48" doors

Field-sizable

Weatherproof

Order #

- V-40
- V-40xEB
- V-40xEBxW

Black

711

48" Doors

48

PANIC SHIELDS

NO MOUNTING HOLES

- | | |
|-----------------|-----------------|
| 24": | 12": |
| Black: PS-24-B | Black: PS-12-B |
| Silver: PS-24-S | Silver: PS-12-S |
| Steel: PS-24-PL | Steel: PS-12-PL |



Mounting plate for any panic bar
Turn gates into emergency exits
16ga electro-galvanized steel
Adjustable for 28"-54" gates
Available in 24" and 12"
Black & Silver: Powder-Coated finish
Steel: Unfinished

PREDRILLED PANIC SHIELDS FOR LOCKEY PANIC BARS

- | | |
|-------------------|-------------------|
| 24": | 12": |
| Black: PS-1124-B | Black: PS-1112-B |
| Silver: PS-1124-S | Silver: PS-1112-S |
| Steel: PS-1124-PL | Steel: PS-1112-PL |



PREDRILLED PANIC SHIELDS FOR DETEX PANIC BARS

- | | |
|-------------------|-------------------|
| 24": | 12": |
| Black: PS-DX24-B | Black: PS-DX12-B |
| Silver: PS-DX24-S | Silver: PS-DX12-S |
| Steel: PS-DX24-PL | Steel: PS-DX12-PL |

EDGE PANIC SHIELDS

AVAILABLE PREDRILLED FOR
PB1100, PB2500, or DETEX V40

- Order #**
PS-EDGE-B
PS-EDGE-S
(Specify panic bar hole pattern)



EDGE Mounting Plate
Turn gates into emergency exits
16ga electro-galvanized steel
Adjustable for 28"-54" gates
Available in 24" and 12"
Available in Black or Silver
Powder-Coated finish

MAX GUARD



Mounts above panic bar
Prevents tampering from outside the gate
16ga electro-galvanized steel
4" protrusion, 24" wide

- Order Numbers:**
Powder-Coated Black: PS-MAX-B
Powder-Coated Silver: PS-MAX-S
Steel: PS-MAX-PL

LATCH PROTECTOR

Provides extra security to gate latches
For gates with over 1" gap
16ga electro-galvanized steel
Powder-Coated finish
23.375" long

- Order Numbers:**
Black: PS-LP-B
Silver: PS-LP-S



PANIC SHIELD EXTENSION PLATES

Extends panic shield up to 74"
16ga electro-galvanized steel
Available in 24" or 12"
Black & Silver: Powder-Coated
Steel: No finish



- | | |
|------------------|--------------------|
| 24": | 12": |
| Black: PS-EXT-B | Black: PS-EXT12-B |
| Silver: PS-EXT-S | Silver: PS-EXT12-S |
| Steel: PS-EXT-PL | Steel: PS-EXT12-PL |

STRIKE BRACKETS

1/4" Steel, Powder-Coated
Adjustable
Fits up to 3" post
Available in Black or Silver



- Order Numbers:**
Black: PS-SB-B
Silver: PS-SB-S



INCLUDES

- Panic Shield
- Panic Bar (36")
- Strike Bracket
- PSGB-5 Key Box
- Keyed Cylinder

OPTIONS

Panic Shield:

Lockey, Detex, or Edge pre-drilled panic shield
 Height: 24" or 12"
 Finish: Plain (unfinished steel), Black, or Silver

Panic Bar:

Lockey PB1100, PB2500, PB2500 Alarm, or
 Detex V40 Series

Strike Bracket:

Black or Silver

Key Box:

Black or Silver



DIMENSIONS & SPECIFICATIONS

Panic Shield Dimensions:

Height: 24" or 12"

Width: Expandable up to 54"

Material: 16-Gauge electro-galvanized steel

Finish: Powder-coated black or silver

Panic Bar Sizing:

Length: 33" for 36" doors, 42" for 48" doors

Field-sizable: Can be cut down to 27"



12" Panic Shield with PB1100



24" Panic Shield with PB1100



ORDERING INFORMATION

Order #:

- PS-11 Safety
- PS-11 EDGE Safety
- PS-DX Safety
- PS-DX EDGE Safety
- PS-2500EDGE Safety

Alarm Bar Order #'s:

- PS-DX-Alarm-Safety
- PS-DX-Alarm-EDGE-Safety
- PS-2500-Alarm-EDGE-Safety

Please specify size & finish for all products included in the panic shield kit.



INCLUDES

Panic Shield, Panic Bar (36"), 285-P Panic Trim, PSGB200 Keyless Trim Box, Strike Bracket, Max Guard
*Edge Security Kits also include Latch Protector

OPTIONS

Panic Shield:

Lockey, Detex, or Edge pre-drilled panic shield
Height: 24" or 12"

Finish: Plain (unfinished steel), Black, or Silver

Panic Bar:

Lockey PB1100, PB2500, PB2500 Alarm, or Detex V40 Series

Keyless Panic Trim:

Finish: AB, BB, BC, JB, MG, OB, SC (standard), SN, WH

Strike Bracket:

Black or Silver

Keyless Trim Box:

Black or Silver

Max Guard:

Plain, Black, or Silver



DIMENSIONS & SPECIFICATIONS

Panic Shield Dimensions:

Height: 24" or 12"

Width: Expandable up to 54"

Material: 16-Gauge electro-galvanized steel

Finish: Powder-coated black or silver, or raw steel

Panic Bar Sizing:

Length: 33" for 36" doors, 42" for 48" doors

Field-sizable: Can be cut down to 27"



ORDERING INFORMATION

Order #:

PS-11 Security

PS-11 EDGE Security

PS-DX Security

PS-DX EDGE Security

PS-2500EDGE Security

Alarm Bar Order #:

PS-DX-Alarm-Security

PS-DX-Alarm-EDGE-Security

PS-2500-Alarm-EDGE-Security

Please specify size & finish for all products included in the panic shield kit.



INCLUDES

- Panic Shield
- Panic Bar (36")
- Strike Bracket

OPTIONS

Panic Shield:

Lockey, Detex, or Edge pre-drilled panic shield
 Height: 24" or 12"
 Finish: Plain (unfinished steel), Black, or Silver

Panic Bar:

Lockey PB1100, PB2500, PB2500 Alarm, or
 Detex V40 Series

Strike Bracket:

Black or Silver



DIMENSIONS & SPECIFICATIONS

Panic Shield Dimensions:

Height: 24" or 12"
 Width: Expandable up to 54"

Material: 16-Gauge electro-galvanized steel
Finish: Powder-coated black or silver

Panic Bar Sizing:

Length: 33" for 36" doors, 42" for 48" doors
 Field-sizable: Can be cut down to 27"



12" Panic Shield with PB1100



24" Panic Shield with PB1100



ORDERING INFORMATION

Order #:

- PS-11 Value
- PS-11 EDGE Value
- PS-DX Value
- PS-DX EDGE Value
- PS-2500EDGE Value

Alarm Bar Order #'s:

- PS-DX-Alarm-Value
- PS-DX-Alarm-EDGE-Value
- PS-2500-Alarm-EDGE-Value

Please specify size & finish for all products included in the panic shield kit.



FEATURES

- Electronic/mechanical combination deadbolt
- Manual drive deadbolt saves power
- Takes place of existing deadbolt
- Key override
- Backlit keypad
- Automatic lock-down on wrong user code entry
- Up to 20 user codes
- 4-10 digit user codes
- Low battery alarm
- Audible key press
- Reversible handing
- Clutch function to increase security protection

OPTIONS

Finishes:

- Antique Brass
- Bright Brass
- Oil Rubbed Bronze
- Satin Nickel

DIMENSIONS & SPECIFICATIONS

External Dimensions:

- Length: 4.05"
- Width: 2.67"
- Depth: 1.65"

Internal Dimensions:

- Length: 3.46"
- Width: 2.55"
- Depth: 1.22"

Power: 3 x AAA Battery (Alkaline)

Operations: 22,000 cycles

Low Battery: LED indicator lights with battery condition indicator

Material: Zinc alloy, rubber, silicon


Keyway: Kwikset

Keys Included: 2

Finish: Powder coated

For Internal Use

One Year Electronic Warranty

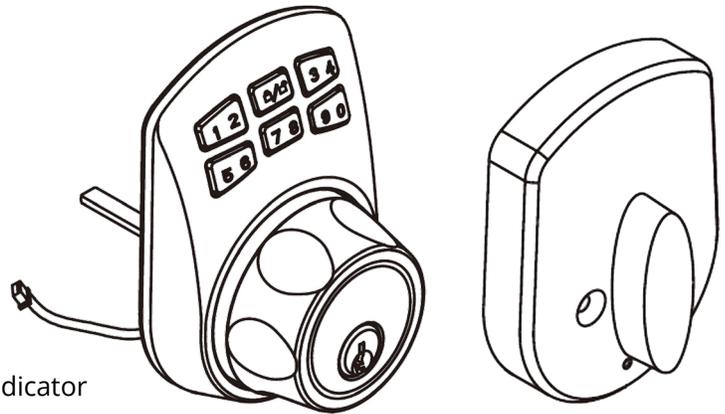

ORDERING INFORMATION

Finish

- Antique Brass
- Bright Brass
- Oil Rubbed Bronze
- Satin Nickel

Order

- SL910AB
- SL910BB
- SL910OIL
- SL910SN





COMBO-CORK BOTTLE LOCK

The Lockey USA Combo Cork Bottle Lock is the perfect solution to securing fine wines and liquors. Simply set the combination, twist the top and rest assured that your bottles are secured.

Ideal for childproofing wine & liquor bottles
Fits most wine & liquor bottles
Easy to change combination

Order Number:
BOT-LOC



KEYLESS KEY SAFE BOX

Secure solution to control access to keys
Suitable for both indoor and outdoor use
Easy to change combination

Dimensions:

Box Size: 2" W x 5 1/2" H x 2 1/2" D

Box Inside: 1 9/16" W x 5" H x 5/8" D

Finish

Jet Black
Marine Grade
Satin Nickel
White

Order Number:

KEYBOXJB
KEYBOXMG
KEYBOXSN
KEYBOXWH



MS-40 COMBINATION SLIDE BOLT

The MS-40 Combination Slide Bolt is ideal for equipping a variety of applications with keyless access.

Recommended uses include:

Gates
Sheds
Cabinets

Dimensions:

Slide Bolt Dimensions: 3 1/2" W x 1 15/16" H



Receiver Dimensions: 7/8" W x 1 15/16" H

Order Number:
MS-40



FEATURES

- Gently closes both small and large gates up to 125lbs.
- Pushes gate closed
- Adjustable closing speed
- Can be installed on top, bottom or middle of gate
- Recommended for pool, garden and barrier gates
- Can be used on lightweight (non fire-rated) doors
- Works best on gates with in-line/flush hinges

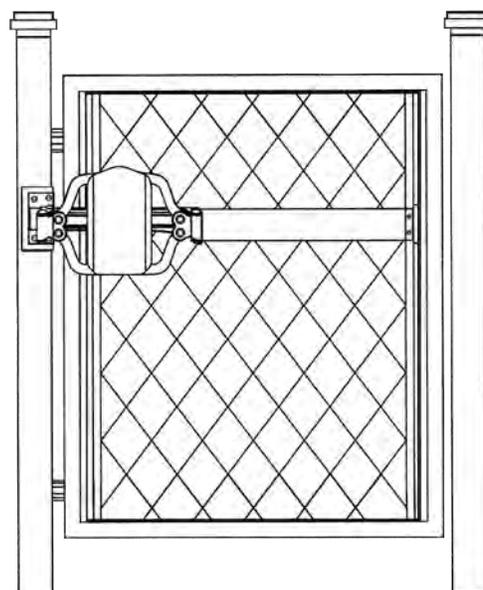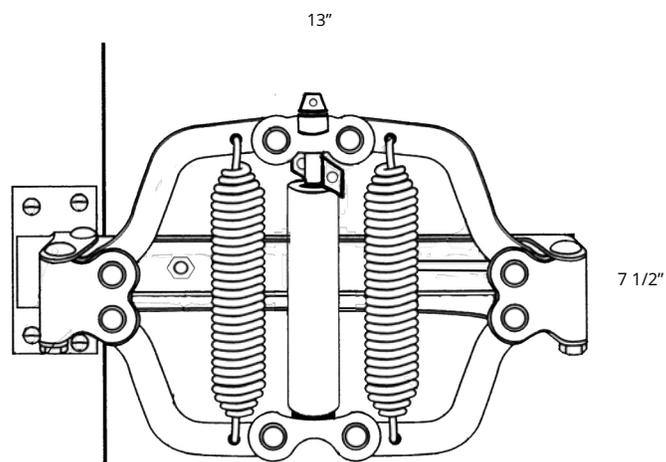

DIMENSIONS & SPECIFICATIONS

Dimensions:

Length: 7 1/2"

Width: 13"

Depth: 2 1/2"

Mounting Bracket Dimensions: 3 1/4" x 1 3/4"

Max. Gate Weight: 125 lbs.

Max. Gate Width: 54"

Max. Opening Angle: 90 degrees

Min. Operating Temperature: 10 degrees

Max. Operating Temperature: 110 degrees

Type of Gate Material: Vinyl, Wood, Steel, Chain Link

Closing/Latching Method: Hydraulic

Material: Steel

Finish: Powder-Coated

Color: Black

Hinge Arrangements: In-line/flush hinges

Opening Pressure: Variable, depending on gate size

The LockeyUSA Turtle Back TB100 Hydraulic Gate closer must mount on the hinge side/pull side of the gate in order to push the gate closed. The TB100 works best if the gate has in-line/flush hinges flush with the gate post with 1" or less gap.

ORDERING INFORMATION

Order #: TB100



FEATURES

- Flush mount gate closer
- Closes gates 50 to 125 lbs. easily and gently
- Installs on top/middle/bottom
- Works with left and right hand gates
- Will work with most in-line hinge arrangements
- Mounts on opening side of gate
- Pushes the gate closed
- Adjustable closing speed
- Adjustable latching speed
- Hold open feature

OPTIONS

Black, White



DIMENSIONS & SPECIFICATIONS

Dimensions:

- Length: 12 1/2"
- Width: 2 1/2"
- Depth: 2 3/8"

Max. Gate Weight: 125 lbs.

Max. Gate Width: 54"

Max. Opening Angle: 90 degrees

Type of Gate Material: Metal, Vinyl, Wood

Closing/Latching: Adjustable


Material: Steel

Color: Black or White

Finish: Powder coated

Hinge Arrangements: In-line

Opening Pressure: Variable depending on gate size

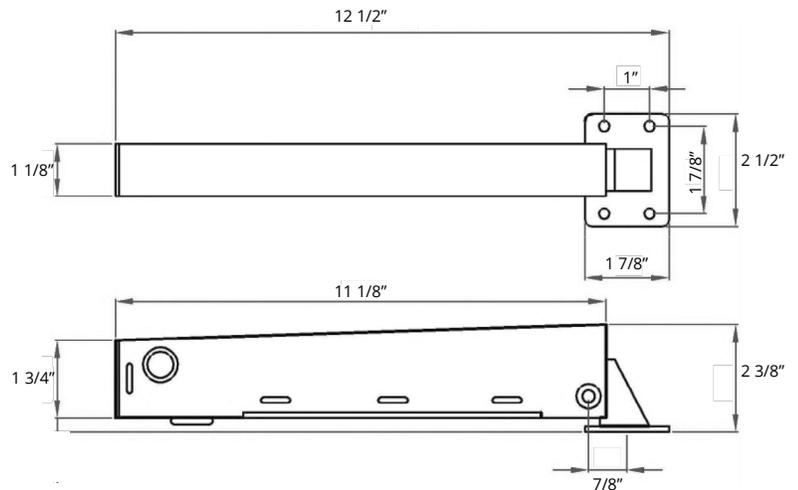

The TB175 may not be compatible with offset hinge arrangements or arrangements that create more than 2" between gate post and gate, as it is critical to mount the closer as close as possible to the gate's pivot point.

ORDERING INFORMATION

Finish	Order #:
Black	TB175B
White	TB175W





FEATURES

- Closes small and large gates from 50-125 lbs.
- Hydraulic/Nitrogen Gas controlled closing speed
- Installs on top/middle/bottom
- Works with left and right hand gates
- Mounts on opening side of gate
- Pushes the gate closed
- Mounting brackets and fitting bar included
- Not compatible with gates less than 30 inches wide

OPTIONS


Steel (Black), Stainless Steel (Silver)

DIMENSIONS & SPECIFICATIONS

- Gate Weight: 50-125 lbs.
- Max. Gate Width: 36-52"
- Max. Opening Angle: 100 degrees
- Min. Operating Temperature: 15 degrees Fahrenheit*
- Max. Operating Temperature: 122 degrees Fahrenheit*
- Type of Gate Material: Vinyl, Steel, Wood, Chain Link**
- Closing/Latch Method: Hydraulic/Nitrogen Gas
- Material: Steel or Stainless Steel
- Color: TB200: Black, TB200SS: Silver
- Finish: TB200: Painted, TB200SS: Stainless Steel
- Hinge Arrangements: In-line or Offset
- Opening Pressure: Approx. 3-7 lbs.

*Operation of the closer in temperatures below or above the minimum and maximum operating temperatures may result in improper operation or complete failure of the closer.

**TB200 can be mounted on chain link gates with the TB-LINX. TB-LINX sold separately. TB-LINX shown to the right.

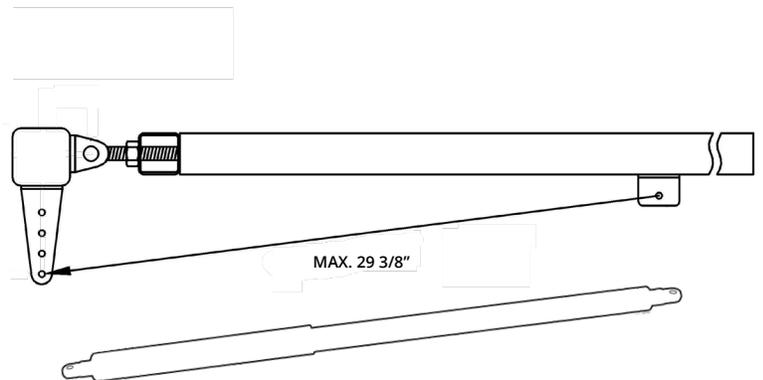

ORDERING INFORMATION

<u>Material, Color</u>	<u>Order #:</u>
Steel, Black	TB200
Stainless Steel, Silver	TB200SS



FEATURES

- Adjustable hydraulic (nitrogen gas) controlled closing speed
- Closes small and large gates from 50-125 lbs.
- Installs on top/middle/bottom
- Works with left and right hand gates
- Mounts on opening side of gate
- Pushes the gate closed
- Mounting brackets and fitting bar included
- Not compatible with gates less than 30 inches wide

OPTIONS

Black, White, or Gray

DIMENSIONS & SPECIFICATIONS

- Gate Weight: 50-125 lbs.
- Gate Width: 36-52"
- Max. Opening Angle: 100 degrees
- Min. Operating Temperature: 15 degrees Fahrenheit*
- Max. Operating Temperature: 122 degrees Fahrenheit*
- Type of Gate Material: Vinyl, Steel, Wood, Chain Link**
- Closing/Latch Method: Hydraulic/Nitrogen Gas
- Material: Steel
- Color: Black, White, or Gray
- Finish: PVC wrapped
- Hinge Arrangements: In-line or Offset
- Opening Pressure: Approx. 3-7 lbs.

*Operation of the closer in temperatures below or above the minimum and maximum operating temperatures may result in improper operation or complete failure of the closer.

**TB250 can be mounted on chain link gates with the TB-LINX. TB-LINX sold separately. TB-LINX shown to the right.



ORDERING INFORMATION

<u>Finish</u>	<u>Order #:</u>
TB250 Black	TB250B
TB250 White	TB250W
TB250 Gray	TB250G



FEATURES

- Closes small and large gates from 75-175 lbs.
- Hydraulic/Nitrogen Gas controlled closing speed
- Installs on top/middle/bottom
- Works with left and right hand gates
- Mounts on opening side of gate
- Pushes the gate closed
- Mounting brackets and fitting bar included
- Not compatible with gates less than 30 inches wide

OPTIONS

Steel (Black), Stainless Steel (Silver)

DIMENSIONS & SPECIFICATIONS

- Gate Weight: 75-175 lbs.
- Gate Width: 40-64"
- Max. Opening Angle: 100 degrees
- Min. Operating Temperature: 15 degrees Fahrenheit*
- Max. Operating Temperature: 122 degrees Fahrenheit*
- Type of Gate Material: Vinyl, Steel, Wood, Chain Link**
- Closing/Latch Method: Hydraulic/Nitrogen Gas
- Material: Steel or Stainless Steel
- Color: TB400: Black, TB400SS: Silver
- Finish: TB400: Painted, TB400SS: Stainless Steel
- Hinge Arrangements: In-line or Offset
- Opening Pressure: Approx. 6-12 lbs.

*Operation of the closer in temperatures below or above the minimum and maximum operating temperatures may result in improper operation or complete failure of the closer.

**TB400 can be mounted on chain link gates with the TB-LINX. TB-LINX sold separately. TB-LINX shown to the right.



ORDERING INFORMATION

<u>Material, Color</u>	<u>Order #:</u>
Steel, Black	TB400
Stainless Steel, Silver	TB400SS



FEATURES

- Adjustable hydraulic (nitrogen gas) controlled closing speed
- Closes small and large gates from 75-175 lbs.
- Installs on top/middle/bottom
- Works with left and right hand gates
- Mounts on opening side of gate
- Pushes the gate closed
- Mounting brackets and fitting bar included
- Not compatible with gates less than 30 inches wide

OPTIONS

Black, White, or Gray

DIMENSIONS & SPECIFICATIONS

- Gate Weight: 75-175 lbs.
- Gate Width: 40-64"
- Max. Opening Angle: 100 degrees
- Min. Operating Temperature: 15 degrees Fahrenheit*
- Max. Operating Temperature: 122 degrees Fahrenheit*
- Type of Gate Material: Vinyl, Steel, Wood, Chain Link**
- Closing/Latch Method: Hydraulic/Nitrogen Gas
- Material: Steel
- Color: Black, White, or Gray
- Finish: PVC coated
- Hinge Arrangements: In-line or Offset
- Opening Pressure: Approx. 6-12 lbs.

**Operation of the closer in temperatures below or above the minimum and maximum operating temperatures may result in improper operation or complete failure of the closer.*

***TB450 can be mounted on chain link gates with the TB-LINX. TB-LINX sold separately. TB-LINX shown to the right.*



ORDERING INFORMATION

<u>Finish</u>	<u>Order #:</u>
TB450 Black	TB450B
TB450 White	TB450W
TB450 Gray	TB450G



FEATURES

- Closes small and large gates from 150-250 lbs.
- Hydraulic/Nitrogen Gas controlled closing speed
- Installs on top/middle/bottom
- Works with left and right hand gates
- Mounts on opening side of gate
- Pushes the gate closed
- Mounting brackets and fitting bar included
- Not compatible with gates less than 30 inches wide

OPTIONS

Steel (Black), Stainless Steel (Silver)

DIMENSIONS & SPECIFICATIONS

- Gate Weight:** 150-250 lbs.
- Gate Width:** 44-72"
- Max. Opening Angle:** 100 degrees
- Min. Operating Temperature:** 15 degrees Fahrenheit*
- Max. Operating Temperature:** 122 degrees Fahrenheit*
- Type of Gate Material:** Vinyl, Steel, Wood, Chain Link**
- Closing/Latch Method:** Hydraulic/Nitrogen Gas
- Material:** Steel or Stainless Steel
- Color:** TB600: Black, TB600SS: Silver
- Finish:** TB600: Painted, TB600SS: Stainless Steel
- Hinge Arrangements:** In-line or Offset
- Opening Pressure:** Approx. 8-18 lbs.

*Operation of the closer in temperatures below or above the minimum and maximum operating temperatures may result in improper operation or complete failure of the closer.

**TB600 can be mounted on chain link gates with the TB-LINX. TB-LINX sold separately. TB-LINX shown to the right.



ORDERING INFORMATION

Material, Color	Order #:
Steel, Black	TB600
Stainless Steel, Silver	TB600SS



FEATURES

- Adjustable hydraulic (nitrogen gas) controlled closing speed
- Closes small and large gates from 150-250 lbs.
- Installs on top/middle/bottom
- Works with left and right hand gates
- Mounts on opening side of gate
- Pushes the gate closed
- Mounting brackets and fitting bar included
- Not compatible with gates less than 30 inches wide

OPTIONS

Black, White, or Gray

DIMENSIONS & SPECIFICATIONS

- Gate Weight: 150-250 lbs.
- Gate Width: 44-72"
- Max. Opening Angle: 100 degrees
- Min. Operating Temperature: 15 degrees Fahrenheit*
- Max. Operating Temperature: 122 degrees Fahrenheit*
- Type of Gate Material: Vinyl, Steel, Wood, Chain Link**
- Closing/Latch Method: Hydraulic/Nitrogen Gas
- Material: Steel
- Color: Black, White, or Gray
- Finish: PVC coated
- Hinge Arrangements: In-line or Offset
- Opening Pressure: Approx. 8-18 lbs.

**Operation of the closer in temperatures below or above the minimum and maximum operating temperatures may result in improper operation or complete failure of the closer.*

***TB650 can be mounted on chain link gates with the TB-LINX. TB-LINX sold separately. TB-LINX shown to the right.*




ORDERING INFORMATION

Finish	Order #:
TB650 Black	TB650B
TB650 White	TB650W
TB650 Gray	TB650G




FEATURES

- All-in-one closer and hinge system
- Self-closing
- Concealed, high use, pedestrian gate closer
- Tamper and vandal resistant
- Two speed adjustments: closing & latching
- Closes gates weighing between 50-250 lbs.
- Works with left and right hand gates
- No hold open
- Restrictor to avoid over opening
- Speed adjustments hidden from view
- 180 degree capable with 180 Drive Plate*

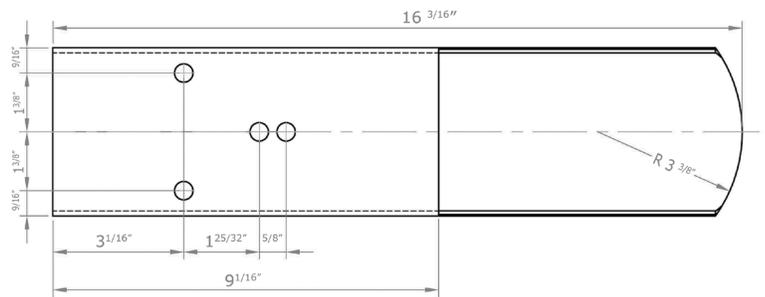

DIMENSIONS & SPECIFICATIONS

- Max. Gate Weight: 50-250 lbs.
- Max. Gate Width: 48"
- Max. Gate Height: 78"
- Max. Opening Angle: 90 degrees, 180 degrees with 180 Drive Plate*
- Min. Operating Temperature: -40 degrees Fahrenheit
- Max. Operating Temperature: 122 degrees Fahrenheit
- Type of Gate Material: Ornamental, Chain Link**
- Material: Steel
- Finish: Electro-galvanized
- Color: Gold

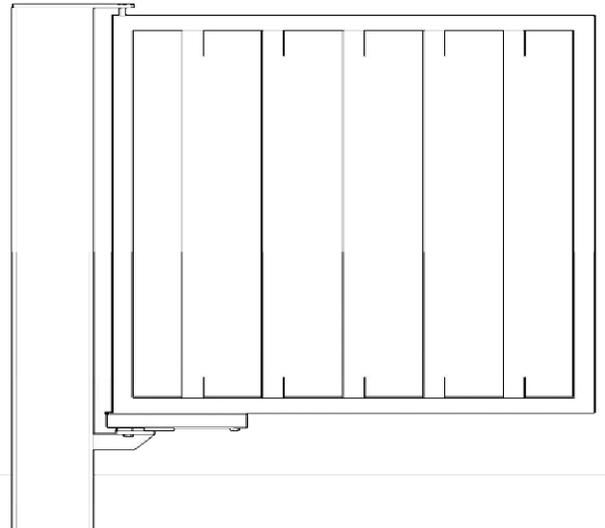

- *180 Drive Plate sold separately
- **Mounts on Chain Link with TB950-LINX (sold separately)

ORDERING INFORMATION

Order #:
TB950



EC SERIES USER MODES: PUBLIC, PRIVATE, & RAS

Locks in the **Electronic Cabinet and Locker Lock Series** are available in three user modes: Public, Private, and Remote Allocation System mode (RAS).

PUBLIC MODE

User code is lost when opened.

Commonly used for locks on shared spaces such as in fitness locker rooms, shared work spaces, festivals and amusement parks.

TO SET IN PUBLIC MODE:
[LOGO] [MASTER CODE] [08]

TO LOCK:

1. Select the open locker, cabinet or drawer.
2. Place items inside and close the door.
3. Engage lock by turning handle.
4. Enter any four digit code.
5. Re-enter the same four digit code.
6. It is now locked.

TO UNLOCK:

1. Return to the lock.
2. Enter your four digit code on the keypad.
3. Turn handle to disengage.
4. The lock is now unlocked.

PRIVATE MODE

User code is retained when opened.

Commonly used for locks on cabinets, lockers, drawers and other applications in non-shared spaces. The lock is assigned to an individual user.

TO SET IN PRIVATE MODE:
[LOGO] [MASTER CODE] [09] [NEW USER CODE]

TO UNLOCK:

1. Enter assigned four digit code.
2. Turn handle to disengage.
3. Place items inside.

TO LOCK:


1. Close the door.
2. Return handle back to the locked position.

The lock **automatically** relocks after four seconds and engages when the handle is returned back to the locked position.

REMOTE ALLOCATION SYSTEM

User code is managed online.

The Remote Allocation System (RAS) is an online code management system available on all keypad locks in the Electronic Cabinet & Locker Series. With **RAS**, administrators can remotely manage all locks without ever having to go to the lock itself!

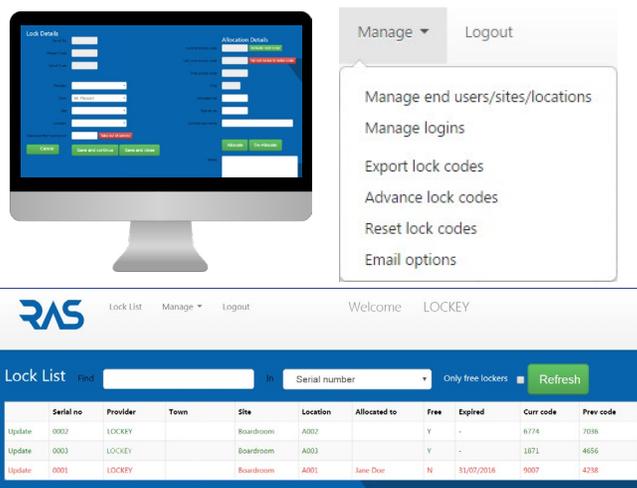

Through the online portal, administrators can view a detailed overview of all the locks they currently manage. The lock list provides information such as the serial number, location of the lock and who the lock is currently allocated to.

Change many or all lock codes at once!

1. Select locks to be updated.

2. Click "Manage."

3. Click "Advance lock codes."

The next user code is now available!

Administrators can manage a single lock by clicking "Update," which can be found on the far left side of the lock list. This will allow the administrator to see all details of the lock.

From the lock details page, administrators can manage, amend and update all aspects of the individual lock.

Administrators can advance the lock code, reallocate the lock to a different user, and edit all aspects of the lock details with the **Remote Allocation System**.